davide groppi

WIRELESS	13	SUSPENSION	101	SYSTEMS	223
35MM	15	CATHODE	103	FLASH	225
BUGIA	19	LOUIS XIV	109	INFINITO	241
PoPuP	23	MAGIA	113	ОНМ	253
POST PRANDIUM	27	MISS	123	UTOPIA	261
ТеТаТеТ	33	MOON	127		
TeTaTeT Flûte	39	NEURO	135		
VIS À VIS	43	REFLEX S	139	TRACKS - PROFILES	267
		SHANGHAI	143	BINARIO TRIFASE	269
		SIMBIOSI	147		
TABLE	47	SOTTILE	151		
ANIMA	49	SOTTOSOPRA	155	OUTDOOR	277
CALVINO	53			BELLADINOTTE	279
FM	57			BUBKA	283
MOON T	61	WALL	159	BUBKA BOLLARD	287
MORSETTO	67	DOT P	161	BUIO - TRIMLESS	292
PIGRECO	73	EDISON'S NIGHTMARE	165	BUIO - TRIM	296
		FILM	169	BUIO - SPOT	300
		MIRA	173	GRILLO	307
FLOOR	77	MIRA MAGNETIC	177	IMU	311
MASAI	79	MORSETTO P	181	NEURO OUTDOOR	315
MOON F	85	RAIL	185	NUIT	319
ORIGINE	89	REFLEX	189	ORIGINE OUTDOOR	323
SAMPEI	95	TOAST	193	Q ²	327
				SAMPEI 440 OUTDOOR	331
		CEILING	197		
		ASINTOTO	199	BULBS	335
				DRIVERS	337
				COMMON ACCESSORIES	341
		RECESSED	203	SUSPENSION KITS	342
		DOT R	205		
		MIRA R	209		
		NULLA	213		

INDEX

CODE SYSTEM

Our codification system consists of a fifteen-digit structure defined as follows:

1	A	3	0	0	0	3	0	0		2	7		0	0
	PF	ODUCT FAMI	LY		FIN	ISH	INTERNAL	USE ONLY	-	COLOUR TE	MPERATURE	-	ELECTRII	FICATION

Finish

0	0	Standard
0	1	Polished Chrome
0	3	Matt White
0	4	Matt Black
0	8	Brushed Brass
1	0	Stainless Steel
1	3	Black Brushed Stainless Steel
1	4	Brushed Chrome
1	5	Natural Brass
1	8	Matt Gold
1	9	Polished Gold
2	6	Total Black
2	7	Gravity Black
2	8	Polished Black Chrome
2	9	Brushed Bronze
3	2	Copper Oxide
3	4	Matt White - Black Bicolour
3	6	Brushed Black
3	8	Blasted Inox

Colour temperature

0	0	Light source not included
2	2	2200K
2	7	2700K
3	0	3000K
9	6	2700K / 6500K (Tunable White)
9	8	RGBW (Warm White)
9	9	RGB

Electrification

0	0	ON/OFF
0	1	DALI
0	2	TRIAC/IGBT
0	3	1-10V
0	4	PUSH
0	5	DIM (DALI - PUSH - 1-10V - TRIAC)
0	6	Dimmer on board
0	7	DALI - PUSH - 1-10V
2	0	CLASS III
4	0	ENDLESS
4	1	ENDLESS CASAMBI

In this document the drawings and technical information are to be considered indicative. All product features and technical measurements are available on our website davidegroppi.com

The Davide Groppi handbook is a confidential document and cannot be disclosed.

GUIDELINE TO PROPERLY READ THE CATALOGUE

General data on the product		NULLA				Davide Groppi / 2010
Mounting - Lighting - Use - Material - Finish - Note	•	Recessed / Dir Material Finish Note	Metal .00 Standard Recessed lum			uante da incasso. Foro visibile con diametro da 18/25 mm. 25 appareccho estrabile per manutenzione.
Model specifications		-	*****:s	NULLA - 23* 14W 24V DC 24700C - 425lm / 30000K - 458lm CRI -90 Beam 23* UGR -19	Standard - 2700K Standard - 3000K	1.44100000 27.20 1.44100000 30.20
Technical data - Certifications - Codes		ā	**************************************	Driver not included C € ⊗ IP20/IP45 • NULLA - 32* 14W 24V VDC 2700K - 538lim / 3000K - 579lim	Standard - 2700K	1421100002720
				CRI >90 Beam 32* UGR <19 Driver not included C € ◈ IP20/IP65 ♣	Standard - 3000K Standard - 3000K	1421100003020
		398				

	NULLA				avide Groppi / 20
Compulsory and optional accessories	Compulsory accessorie Installation kits / Kit d'installaz		atori		
Accessories finishes and specifications - Codes	.89	Plasterboard flan Matt Black	ge 12,5 mm / Flangia per cartongesso 12,5 mm Cut-out Ø 21 mm N Minimum space for mounting 100 mm IP65	IULLA 1A2200400.0	Not includ
		Plasterboard flam Matt Black	ige 12,5 mm / Flangia per cartongesso 12,5 mm Cut-out Ø 22 mm N Minimum space for mounting 190 mm	IULLA 18 1A2210400.0	Not includ
	9	Plasterboard flam Matt Black	ige 12,5 mm / Flangia per cartongesso 12,5 mm Cut-out Ø 35 mm N Minimum space for mounting 190 mm	IULLA 25 1A2170400.0	Not includ
	128	Plasterboard flam Matt Black	oge 12,5 mm / Flangia per cartongesso 12,5 mm Cut-out Ø 35 mm N Minimum space for mounting 190 mm IP65	IULLA 25 1A3980400.0	Not includ
Reference model	· 120 . 12	Plasterboard flan Matt Black	ige (bottom) ≠ 12,5 mm / Flangia (da sotto) per car Cut-out Ø 35 mm N Minimum space for mounting 190 mm IP65	rtongesso = 12,5 mm IULLA 25 1A4960400.0	Not include
	Drivers / Alimentatori			_	
	(a)	Driver / Alimental 220-240V(100-12	tore 24V/16W(15W)/IP20/DALI	120241180.2	Not include
		Driver / Alimental 220-240V(100-12	tore (7V) 24V/20W(15W)/IP20/PUSH	120240870.2	Not include
	\$ 700	Driver / Alimenta	tore		Not include
		220-240V	24V/20W/IP20/TRIAC/IGBT	1Z0240850.2	4

PICTOGRAPHY

Class II appliance: appliance whose protection against electric shock is not only relevant to the main insulation, but also includes additional safety measures, such as dual insulation or reinforced insulation. These measures do not include ground devices as protection and do not depend on the installation conditions.



Class III appliance: appliance whose safety against electric shock is based on safe extra low voltage power supply. Compliance with legislation is guaranteed only if the appliance is powered by a SELV safety transformer/driver in compliance with legislation in force. The appliance must not be connected to ground conductors.



Degree of protection against access of foreign bodies, dust and



Appliance with this symbol can only use low pressure bulbs or bulbs with safety glass.



Do not use cold light lamps.



 $\bigcap_{-m} \mathbb{I}$ To prevent the risk of fire, maintain the minimum distance indicated from the bulb with lighting objects. This distance should be measured along the optical axis of the appliance to the closest lighting object.



Color Rendering Index: the degree of colour distortion under a given light source in comparison with a reference light source. The optimum colour rendition index is Ra=100.

lm

The luminous flux, measured in lumen, indicates the quantity of light perceived by the human eye emitted by a light source. In Davide Groppi lights with an integrated module, the deliverd lumen flux is obtained from the photometric measurement. In lights with a lightbulb included, the luminous flux is indicated provided by the manufacturer of the lightbulb.



Luminaire designed to be powered by ENDLESS conductive tape.



Luminaire integrated with Casambi, the Bluetooth Low Energy (BLE) technology for lighting control.



Luminaire with Extradark comfort system. The Extradark system associates an optical TIR PMMA lens to an element that geometrically shields the light beam viewing angle to obtain highly uniform lighting and full beam control. The polished black light shield is used to control the mirror reflection of the light, perfectly controlling the unified glare rating (UGR* <19).

All Davide Groppi products, except those specifically indicated, are equipped with electronic light sources (LED).

The selection of diodes is carried out with the utmost care to guarantee the highest levels of performance and luminous uniformity.

10 11

WIRELESS



Those dear old slides. Nobody pays any attention to them anymore.

It's the smallest lamp in our collection.

It's an idea, a thought, a pendant, something you can wear.

The pulsating light and the images you choose to display on it make 35MM unique and exceptional.

35MM

Alessandra Dallagiovanna - Davide Groppi / 2009

Objects / Diffuse / Wireless


Metal - Polycarbonate Material

Finish .00 Standard

Note

Battery-operated wearable luminaire. Matt white front. Glossy black back. Customised image not included. Intermittent light. *Minimum purchase:

3 pieces.



35MM

0,3W ON/OFF

Batteries 2xCR2032 included

C € ⊕ IP20

Standard - ON/OFF

1A2640000.00.00





17 16



A lightweight and soft light. A lamp designed to enjoy wonderful diffuse light but without an electrical cable.

BUGIA Davide Groppi / 2018

Table / Diffuse / Wireless

Material Metal - Methacrylate
Finish .18 Matt Gold

Note Chargeable table luminaire. Matt white diffuser. Gold finish base. Battery

life: 9 hours.



BUGIA

2W

3000K - 120lm CRI >90

ON/OFF

Driver with plug not included

USB cable included

Optional accessories

Drivers



Driver with plug					
Matt Black	Input 110-240V - 50/60Hz Output 5V DC - 2A - 10W - IP20	1Z0000088			

Matt Gold - 3000K - ON/OFF

1A2351808.30.00

Other accessories



USB to USB-C cable	е	Included
Matt Black	Length 1 m	1Z0000132






Light*Music*Wireless
Created to give you both light and music any place, at any time.
PoPuP accompanies you during your unforgettable moments.
The sounds it produces are dynamic and of excellent quality.
Light and sound can also be enjoyed separately.
Listen to the light.

PoPuP Davide Groppi / 2016

Table / Direct / Wireless

Metal - Methacrylate Material .03 Matt White Finish

Chargeable table luminaire and speaker. Magnetic fixing stem. Battery life: 12 hours light only and 30 hours audio only at medium volume. Note



PoPuP

2W

3000K - 183lm CRI >80

ON/OFF

5W Audio - 50-20000Hz Driver with plug included

Matt White - 3000K - ON/OFF

1A2610308.30.00

Optional accessories

Drivers



Driver		Not included
	Input 110-240V - 50/60Hz Output 14V DC - 0,3A - IP20	1Z0000102

Other accessories



Rechargeable battery			Included
Matt White	12V DC - NiMH 3700mAh	1A2620300.00.00	







During a meal with friends, a ladle is reused to scoop up the light and serve it onto the table.

A project from many years ago, today in a new wireless version.

Archiproducts Design Award 2023

POST PRANDIUM

Davide Groppi / 2023

Table / Direct / Wireless

Material Metal - Methacrylate
Finish .01 Polished Chrome

Note Chargeable table luminaire. Details with polished gold finish. Matt black

base. Battery life: 9 hours.



POST PRANDIUM

2W 3000K - 171lm CRI >90 ON/OFF

Driver with plug not included

USB cable included



Optional accessories

Drivers



Driver with plug					
Matt Black	Input 110-240V - 50/60Hz Output 5V DC - 2A - 10W - IP20	1Z0000088			

Other accessories



USB to USB-C cable			Included
Matt Black	Length 1 m	1Z0000132	









A timeless icon with an eye on the future.

Portable and rechargeable, the greatest expression of freedom.

With TeTaTeT, every table becomes a meeting place, a complete dining experience.

Its light caresses those it illuminates with pure emotion.

Equipped with Touch technology and a magnetic fixing base.

Mention of Honour XXIV Compasso d'Oro ADI Award, 2016



TeTaTeT Davide Groppi / 2013

Table / Direct / Wireless

Material ABS - Metal - Methacrylate

Finish .03 Matt White .04 Matt Black .18 Matt Gold

Note Chargeable table luminaire. Magnetic fixing stem. Touch ON/OFF. Battery

life: 12 hours. *Minimum purchase: 3 pieces.



TeTaTeT

2W 2700K - 165lm / 3000K - 178lm CRI >90 ON/OFF

Driver with plug not included

| IP20

l	
Matt White - 2700K - ON/OFF	1A0310308.27.00
Matt White - 3000K - ON/OFF	1A0310308.30.00
Matt Black - 2700K - ON/OFF	1A0310408.27.00
Matt Black - 3000K - ON/OFF	1A0310408.30.00
Matt Gold - 2700K - ON/OFF	1A0311808.27.00
Matt Gold - 3000K - ON/OFF	1A0311808.30.00

Optional accessories

Drivers



Driver with plug		Not included
Matt Black	Input 110-240V - 50/60Hz Output 6V DC - 1A - 6W - IP20	1Z0000073

Other accessories



Rechargeable battery		Included
Matt White	4,8V DC - NiMH 4300mAh	1A0430300.00.00
Matt Black	4,8V DC - NiMH 4300mAh	1A0430400.00.00
Matt Gold	4,8V DC - NiMH 4300mAh	1A0431800.00.00

Davide Groppi / 2013 TeTaTeT

Optional accessories

Other accessories




Table	Not included
Matt White	1A4020300.00.00
Matt Black	1A4020400.00.00

34 35







This is an evolution of our TeTaTeT lamp.

The lamp head is lightweight and appears to be floating in air.

The transparent stem brings to mind the glasses used in the classic "mise en place".

Magnetic fixing base.


TeTaTeT Flûte Davide Groppi / 2017

Table / Direct / Wireless

Material Metal - Methacrylate
Finish .03 Matt White

Note Chargeable table luminaire. Magnetic fixing transparent stem. Magnetic

LED module. Battery life: 9 hours. *Minimum purchase: 3 pieces.



TeTaTeT Flûte

2W

2700K - 167lm / 3000K - 180lm

CRI >90 ON/OFF

ON/OFF Driver with plug not included

USB cable included

Optional accessories

Drivers



Driver with plug		Not included
Matt Black	Input 110-240V - 50/60Hz Output 5V DC - 2A - 10W - IP20	1Z0000088

Matt White - 2700K - ON/OFF

Matt White - 3000K - ON/OFF

1A2360308.27.00

1A2360308.30.00

LED modules



LED module			Included
Matt White	2W - 2700K - 167lm - CRI >90 Rechargeable lithium battery 5V DC Li-lon 4800mAh - Battery life 9 hours	1A5360308.27.00	
	2W - 3000K - 180lm - CRI >90 Rechargeable lithium battery 5V DC Li-lon 4800mAh - Battery life 9 hours	1A5360308.30.00	


Davide Groppi / 2017 TeTaTeT Flûte

Optional accessories

Other accessories



USB to USB-C cable	
Length 1 m	1Z0000132
	Length 1 m



Not included
1A4020300.00.00
1A4020400.00.00

40 41



Table / Direct / Wireless

Metal - Methacrylate Material Finish .00 Standard

Chargeable table luminaire. Transparent disc with refractive effect. Magnetic fixing LED module and transparent stem. Battery life: 9 hours. Note



VIS À VIS

2W

2700K - 110lm / 3000K - 113lm

CRI >90 ON/OFF

Driver with plug not included

USB cable included

1A4530008.27.00 Standard - 2700K - ON/OFF 1A4530008.30.00 Standard - 3000K - ON/OFF

Optional accessories

Drivers



Driver with plug		Not included
Matt Black	Input 110-240V - 50/60Hz Output 5V DC - 2A - 10W - IP20	1Z0000088

LED modules



LED module			Included
Matt White	5W - 2700K - 110lm - CRI >90 Rechargeable lithium battery 5V DC Li-lon 4800mAh - Battery life 9 hours	1A5370008.27.00	
	2W - 3000K - 113lm - CRI >90 Rechargeable lithium battery 5V DC Li-lon 4800mAh - Battery life 9 hours	1A5370008.30.00	

Other accessories



USB to USB-C cable		Included
Matt Black	Length 1 m	1Z0000132



TABLE



Davide Groppi - Giorgio Rava / 2021

A slender, light, ephemeral and abstract sculpture, it is a weightless ideogram. It's the emotion of an indirect light with an aesthetic poised between Scandinavian and Japanese design, two apparently distant cultures but, actually, very close. At the top, an open circle, almost a hook for fishermen of the soul. Selection for ADI Design Index 2022

AZ Award 2022

Archiproducts Design Award 2021

ANIMA

Davide Groppi - Giorgio Rava / 2021

Table-Floor / Indirect / Indoor

Material ABS - Carbon fiber - Metal

Finish .04 Matt Black

Note Table luminaire. Touch ON/OFF and adjustment. Black cable.



ANIMA

4W

5V DC

2700K - 575lm / 3000K - 589lm

CRI >80

Dimmer on board

Driver with plug not included

USB cable included

Matt Black - 2700K - Dimmer on board Matt Black - 3000K - Dimmer on board

1A1090408.27.06 1A1090408.30.06

Optional accessories

Drivers



 Driver with plug
 Not included

 Matt Black
 Input 110-240V - 50/60Hz Output 5V DC - 2A - 10W - IP20
 1Z0000088

Other accessories



USB to USB-C cable		Included
Matt Black	Length 1 m	1Z0000132





Full and empty, shadow and light.
A circular mirror to be positioned as you please,
to both light and capture the surrounding space.

Born Series Award 2019

CALVINO Davide Groppi / 2018

Table / Indirect / Indoor


Material Brass - Metal - Methacrylate - Mirror

Finish .00 Standard

Note Table luminaire. Disc with mirror finish adjustable in all directions. Matt

blue rear disc. Matt black base. Brass stem. Dimmer on the cable. Black

cable.



CALVINO

18W

24V DC

2700K - 1275lm / 3000K - 1372lm

CRI >90

Driver not included


Dimmer on board

Driver with plug not included

Standard - 2700K - Dimmer on board Standard - 3000K - Dimmer on board 1A2710008.27.06 1A2710008.30.06

Optional accessories

Drivers



Driver with plug		Not included
Matt Black	Input 110-240V - 50/60Hz	1Z0431020
	Output 24V DC - 18W - IP20	




An antenna of light.
Antennas are mysterious, absolute and intrinsically beautiful,
because their essentialness expresses nothing more than their function.
A performing, adjustable and extremely comfortable light.
Selection for ADI Design Index 2023
Archiproducts Design Award 2022

Table / Direct / Indoor

Material Carbon fiber - Metal
Finish .04 Matt Black

Note Table luminaire. Adjustable along the vertical axis. ON/OFF and push

control. Black cable.



FM 1,5W

5V DC

2700K - 154lm / 3000K - 179lm

CRI >90 UGR <19

Dimmer on board

Driver with plug not included

USB cable included

 Matt Black - 2700K - Dimmer on board
 1A2440408.27.06

 Matt Black - 3000K - Dimmer on board
 1A2440408.30.06

Optional accessories

Drivers



 Driver with plug
 Not included

 Matt Black
 Input 110-240V - 50/60Hz Output 5V DC - 2A - 10W - IP20
 1Z0000088

Other accessories




 USB to USB-C cable
 Included

 Matt Black
 Length 1 m
 1Z0000132



MOON T

Davide Groppi / 2019





MOON T Davide Groppi / 2019

Table / Diffuse / Indoor


Material Japanese paper - Metal - PE

Finish .00 Standard

Note Table luminaire. PE and Japanese paper shade. Gold finish base. Dimmer

on the cable. White cable. Compulsory moisture barrier bag packaging for

air and sea shipping.



MOON T

Max 15W - E27 220V - 50/60Hz Dimmer on board Bulb not included

Standard - Dimmer on board

1A2690008.00.06

Optional accessories

Bulbs



LED - E27 - A60		Not included
	220-240V - 11,2W - 360° 2700K - 1521lm - CRI >90 Energy Efficiency D - Dimmable	1Y0330790


Other accessories

Moisture barrier bag			Not included
	Packaging for air and sea shipping	4A2690010	










MORSETTO Davide Groppi / 2017

Table / Direct / Indoor

Material Metal

.04 Matt Black Finish

Table luminaire. Adjustable in all directions. Shiny red clamp. Dimmer on the cable. Black cable. Note



MORSETTO

13W

24V DC

2700K - 700lm / 3000K - 753lm

CRI >90 UGR <19


Dimmer on board

Driver with plug not included

Matt Black - 2700K - Dimmer on board Matt Black - 3000K - Dimmer on board 1A2520408.27.06 1A2520408.30.06

Optional accessories

Drivers




Driver with plug		Not in	cluded
Matt Black	Input 110-240V - 50/60Hz	1Z0431020	
	Output 24V DC - 18W - IP20		







Omar Carraglia / 2019




PIGRECO Omar Carraglia / 2019

Table / Diffuse / Indoor

Material Glass - Oak wood
Finish .00 Standard

Note Table luminaire. Sanded glass ball. Oak wood base. Dimmer on the cable.

Black cable.



PIGRECO


6,5W 24V DC 3000K - 450lm CRI >90

CRI >90 Dimmer on board

Driver with plug not included

Optional accessories


Drivers




Driver with plug			Not included
Matt Black	Input 110-240V - 50/60Hz Output 24V DC - 18W - IP20	1Z0431020	

Standard - 3000K - Dimmer on board

1A2600008.30.06

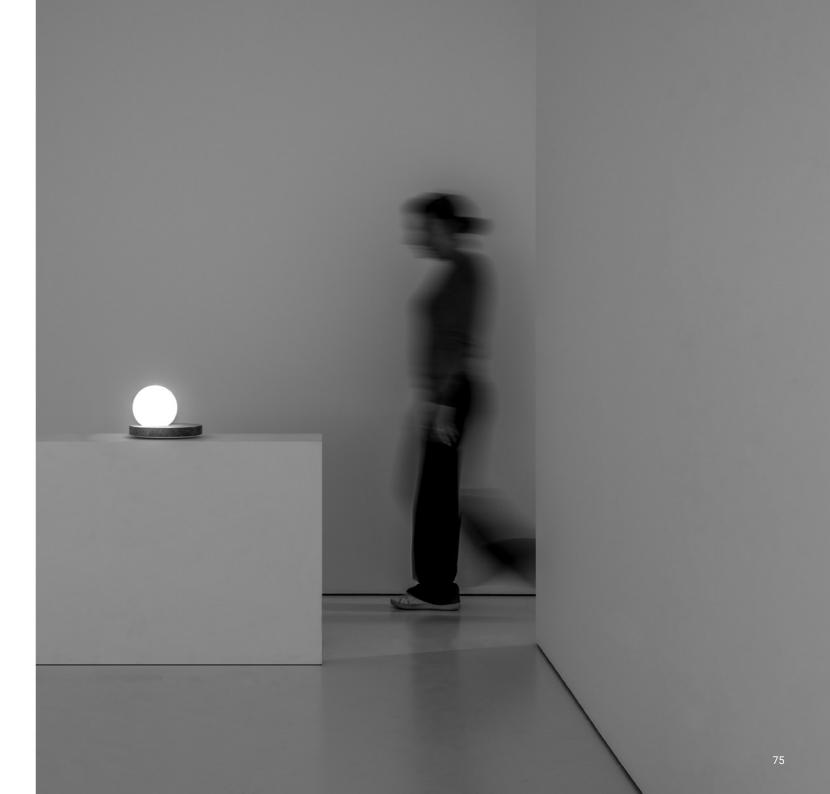

FLOOR



MASAI

Maurizio Mancini / 2015

MASAI Maurizio Mancini / 2015

Suspension kits

Optional accessories



Sloped ceiling suspension kit	
Nickel plated - 1 Piece	1A0510000.00.00



Recessed suspension kit for 12,5 mm plasterboard		Not included
Matt White	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000300.03.00
Matt Black	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000400.03.00



Ceiling suspension kit





Wall adapter plate			Not included
Matt White	For mounting on brick masonry walls	1X0050300.01.00	



304 Stainless steel suspension cable	Not included
Lenght 10 m	1A1680000 00 00

Drivers



Driver			
4V/22W(12W)/IP20/0N/0FF	MASAI 2	1Z0240410	
_	IV/22W(12W)/IP20/ON/OFF	IV/22W(12W)/IP20/ON/OFF MASAI 2	IV/22W(12W)/IP20/ON/OFF MASAI 2 1Z0240410



Dimmable controller				Not included
	DALI - PUSH - 0/1-10V - TRIAC - IP20	MASAI 2	1Z0000034	

Floor-Suspension / Indirect / Indoor

Material Brass - Methacrylate

.03 Matt White


.04 Matt Black

.08 Brushed Brass

Note

Finish


Floor luminaire with ceiling fixing. Adjustable along the vertical axis. Matt white rose. AISI 304 stainless steel suspension cable. Dimmer on the cable. Transparent cable. MASAI 2: version with power cable only and without driver.



MASAI 1

Driver with plug version 15,5W 220V - 50/60Hz 2700K - 600lm / 3000K - 619lm CRI >90 Driver integrated Dimmer on board ((C) IP20

1A2720308.27.06 Matt White - 2700K - Dimmer on board Matt White - 3000K - Dimmer on board 1A2720308.30.06 Matt Black - 2700K - Dimmer on board 1A2720408.27.06 1A2720408.30.06 Matt Black - 3000K - Dimmer on board Brushed Brass - 2700K - Dimmer on board 1A2720808.27.06 Brushed Brass - 3000K - Dimmer on board 1A2720808.30.06



MASAI 2

Remote driver version 13W 220V - 50/60Hz CRI >90 Driver not included

2700K - 600lm / 3000K - 619lm

Matt White - 2700K 1A2720308.27.20 Matt White - 3000K 1A2720308.30.20 Matt Black - 2700K 1A2720408.27.20 Matt Black - 3000K 1A2720408.30.20 Brushed Brass - 2700K 1A2720808.27.20 Brushed Brass - 3000K 1A2720808.30.20

80

Not included







Davide Groppi / 2023

Moon was created from the dream of bringing the moon inside your own home.

The hand-made Japanese paper surface makes every lamp unique.

Suspension and floor versions also available.

MOON F

Davide Groppi / 2023

Floor / Diffuse / Indoor

Material Japanese paper - PE

Finish .00 Standard

Note

Floor luminaire. PE and Japanese paper shade. Matt white base. Dimmer on the cable. White cable. For air and sea shipping: moisture barrier bag packaging compulsory for all models and wooden crate compulsory for MOON 120 F model.




MOON 80 F

Max 15W - E27 220V - 50Hz Dimmer on board Bulb not included IP20

Standard - Dimmer on board

1A4880008.00.06



MOON 120 F

Max 2x25W - E27 220V - 50Hz Dimmer on board Bulb not included | P20

Standard - Dimmer on board

1A4890008.00.06

Davide Groppi / 2023

Optional accessories

Bulb



- E27 - A60				Not included
	220-240V - 11,2W - 360° 2700K - 1521lm - CRI >90 Energy Efficiency D - Dimmable	MOON 80 F	1Y0330790	
	Energy Efficiency D - Dimmable			



LED - E27 - A150				Not included
	220-240V - 20W - 200° 2700K - 2452lm - CRI >80 Energy Efficiency E - Dimmable	MOON 120 F	1Y2160020	

Other accessories

Moisture barrier bag				Not included
	Packaging for air and sea shipping	MOON 80 F	4A2840010	

Moisture barrier bag				Not included
	Packaging for air and sea shipping	MOON 120 F	49860020	_

Wooden crate				Not included
	Packaging for air and sea shipping	MOON 120 F	49860010	

86

MOON F



Davide Groppi - Giorgio Rava / 2020

From the Latin "origo", start, birth, source. It appears like a bud emerging from the ground and soaring upwards towards the sky, a stem that becomes increasingly thinner.

Mysterious and enigmatic, it combines the fascination of the unknown with the pleasure of a sophisticated and elegant ambient light.


Origine sculpts and enhances every environment with its indirect light, which is intentionally non-invasive, graphic and fascinating. Available in 3 different heights and in an outdoor version.

AZ Award 2021 and People's Choice Archiproducts Design Award 2020

Floor / Indirect / Indoor

Glass fiber - Metal Material .04 Matt Black Finish

Note Floor luminaire. Dimmer on the cable. Black cable.



ORIGINE 290

220V

2700K - 1956lm / 3000K - 2075lm

CRI >80

@ IP20

Matt Black - 2700K - Dimmer on board Matt Black - 3000K - Dimmer on board

1A2300408.27.06 1A2300408.30.06



Driver included Dimmer on board

@ IP20

Matt Black - 2700K - Dimmer on board



ORIGINE 490

35W 220V

3000K - 4051lm / 2700K - 3760lm

CRI >80 Driver included

Dimmer on board

@ IP20

Matt Black - 3000K - Dimmer on board

Matt Black - 2700K - Dimmer on board

1A2320408.27.06 1A2320408.30.06

25W

Driver included Dimmer on board

ORIGINE 390

30W 220V

2700K - 2843lm / 3000K - 3063lm

CRI >80

Matt Black - 3000K - Dimmer on board

1A2310408.27.06 1A2310408.30.06





A special project, an authentic ready-made.

Obtained from a flexible fishing rod, it is a delicate and elegant sign, which brings to mind the subtle branches of a willow tree or bamboo canes floating on a light breeze. Sampei is an unexpected gift, it is the magic of looking up, using light as a hook, and being amazed by so much weightlessness. The light is the fisherman's line, catching faces, gazes, people. Available in 4 different heights and also in an outdoor version.

XXIII Compasso d'Oro ADI Award 2014

Elle Deco International Design Award 2011






Floor / Direct / Indoor

Material Glass fiber - Metal

Finish .03 Matt White .04 Matt Black

Note

Floor luminaire. Adjustable in all directions. Dimmer on the cable. White cable for the matt white finish. black cable for the matt black finish.



SAMPEI 230

21W

220V - 50/60Hz

2700K - 1808lm / 3000K - 1890lm

CRI >90

Driver integrated


Dimmer on board

@ IP20

Matt White - 2700K - Dimmer on board

Matt White - 3000K - Dimmer on board

Matt Black - 2700K - Dimmer on board Matt Black - 3000K - Dimmer on board 1A3730308.27.06 1A3730308.30.06 1A3730408.27.06 1A3730408.30.06



SAMPEI 260

21W

220V - 50/60Hz

2700K - 1808lm / 3000K - 1890lm

CRI >90

Driver integrated

Dimmer on board

@ IP20

Matt White - 2700K - Dimmer on board Matt White - 3000K - Dimmer on board Matt Black - 2700K - Dimmer on board Matt Black - 3000K - Dimmer on board 1A3740308.27.06 1A3740308.30.06 1A3740408.27.06 1A3740408.30.06

SAMPEI 290

21W

220V - 50/60Hz

2700K - 1808lm / 3000K - 1890lm

CRI >90

Driver integrated

Dimmer on board

@ IP20

 Matt White - 2700K - Dimmer on board
 1A3750308.27.06

 Matt White - 3000K - Dimmer on board
 1A3750308.30.06

 Matt Black - 2700K - Dimmer on board
 1A3750408.27.06

1A3750408.27.06 1A3750408.30.06

220

SAMPEI 440

21W

220V - 50/60Hz

2700K - 1832lm / 3000K - 1915lm

CRI >90

Driver integrated

Dimmer on board

@ IP20

Matt White - 2700K - Dimmer on board

Matt Black - 3000K - Dimmer on board

Matt White - 3000K - Dimmer on board

Matt Black - 2700K - Dimmer on board Matt Black - 3000K - Dimmer on board 1A3760408.27.06 1A3760408.30.06

1A3760308.27.06

1A3760308.30.06

SAMPEI

Enzo Calabrese - Davide Groppi / 2011

Optional accessories

Other accessories



Accessory holder + Soft filter + Honeycomb louvre Not included

Matt Black 1X0070400.04.00



Accessory holder + Elliptical filter Not included

Matt Black 1X0070400.05.00



 Blue filter
 Not included

 Standard
 Compulsory with 1X0070400.05.00
 1X0070000.06.00



 Red filter
 Not included

 Standard
 Compulsory with 1X0070400.04.00 / 1X0070400.05.00
 1X0070000.07.00



 Yellow filter
 Not included

 Standard
 Compulsory with 1X0070400.04.00 / 1X0070400.05.00
 1X0070000.08.00



SUSPENSION



Omar Carraglia / 2015

A scientific looking bulb made from mouth blown glass.
The shape brings to mind a light bulb that was never born.
Think steampunk: situations in which instruments were inspired by the rudiments of electricity. The classic light bulb that has no future becomes a wonderful device made of luminous diodes.
What would the past have looked like if the future had arrived first?

./3₀

105

Suspension / Diffuse / Indoor

Material Blown glass - Metal

.03 Matt White Finish .08 Brushed Brass

Note

Suspension luminaire. Blown glass diffuser. Matt white rose and white cable for the matt white finish. Matt black rose and black cable for the brushed brass finish. Single rose for more than one lamp on request. CATHODE 2: plasterboard version with magnetic fixing flat rose.



CATHODE 1

Ceiling driver version 5,6W 220V - 50Hz

2700K - 264lm / 3000K - 284lm

CRI >90

Driver integrated

ON/OFF @ IP20

Matt White - 2700K - ON/OFF Matt White - 3000K - ON/OFF Brushed Brass - 2700K - ON/OFF Brushed Brass - 3000K - ON/OFF 1A2980308.27.00 1A2980308.30.00 1A2980808.27.00 1A2980808.30.00



CATHODE 1

Ceiling driver version 6W

220V - 50Hz

2700K - 264lm / 3000K - 284lm

CRI >90 Driver integrated

DALI @ IP20 Matt White - 2700K - DALI Matt White - 3000K - DALI Brushed Brass - 2700K - DALI Brushed Brass - 3000K - DALI

1A2980308.27.01 1A2980308.30.01 1A2980808.27.01 1A2980808.30.01



Remote driver version 4W

Max 350mA DC

2700K - 264lm / 3000K - 284lm

CRI >90 Driver not included

Matt White - 2700K Matt White - 3000K Brushed Brass - 2700K

Brushed Brass - 3000K

1A2990308.27.20 1A2990308.30.20 1A2990808.27.20

1A2990808.30.20

Optional accessories

Suspension kits



ž.

Decentralization kit		Not	included
	CATHODE 1	1A0360000.00.00	



Kit ceiling rose and decentralizer			Not included	
Matt White	White cable 3 m included	CATHODE 1	1A0770300.00.00	
Matt Black	Black cable 3 m included	CATHODE 1	1A0770400.00.00	

Drivers



Driver				Not included
220-240V(100-127V)	350mA/17W(15W)/IP20/DALI	CATHODE 2	1Z0240860.350	




Driver				Not included
220-240V(100-127V)	350mA/18W(15W)/IP20/PUSH	CATHODE 2	1Z0240840.350	





LOUIS XIV

Davide Groppi / 2023



LOUIS XIV Davide Groppi / 2023

Suspension / Direct-Indirect / Indoor


Material

Glass - Metal

Finish .19 Polished Gold

Note

Suspension luminaire. Eighty crystal drops and a bird. Natural brass branches. Structure with polished gold finish. Matt white rose. Dual emission and on/off. White cable. LOUIS XIV 2: version with power cable only and without rose.



LOUIS XIV 2

Remote driver version

15W

Max 250mA DC

2700K - Up 890lm - Down 210lm /

3000K - Up 936lm - Down 235lm

CRI >90

UGR <19

Driver not included

Polished Gold - 2700K Polished Gold - 3000K 1A4361908.27.20 1A4361908.30.20

Optional accessories

Suspension kits



Recessed susper	nsion kit for 12,5 mm plasterboard	Not included
Matt White	For elettrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000300.05.00
Matt Black	For elettrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000400.05.00

Drivers



Driver			Not included
220-240V(110-127V)	250mA/13,5W(13,5W)/IP20/DALI - PUSH - 1-10V	1Z0241270.250	





Michele Groppi / 2023

Archiproducts Design Award 2023

Light and transparency are the true stars of this project. We have always liked to think heretically, evoking mystery, magic and seduction. Magia is the new modular suspension lighting system that can be adapted to suit the different heights of the rooms and can generate direct and indirect light with the 360° adjustable module. In this case, the lens is not used to focus, but to modify the vision and perception of the object. The effect of the convex lens conceals the part of the light beam and produces the lightest effect of suspension and inconsistency.

MAGIA

Michele Groppi / 2023

MAGIA


2 x

RECESSED SUSPENSION KIT 1X0000300.02.00

Single installation with recessed or ceiling suspension kit



Multiple installation with recessed or ceiling suspension kit

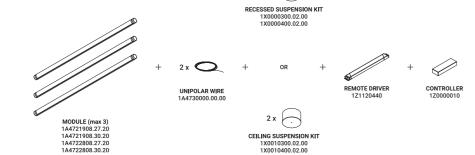

Suspension / Direct-Indirect / Indoor

Michele Groppi / 2023

Material


Metal - PMMA

Finish .19 Polished Gold

.28 Polished Black Chrome

Note

Modular suspension luminaire. Adjustable along the horizontal axis. Transparent bar with refractive effect. LED module profile with matt black finish. Details with polished gold or black chrome finish. Matt white rose.



MAGIA - MODULE

19W 24V DO

24V DC 2700K - 1272lm / 3000K - 1312lm

CRI >90 Driver not included

Polished Gold - 2700K Polished Gold - 3000K Polished Black Chrome - 2700K

Polished Black Chrome - 3000K

1A4721908.30.20 1A4722808.27.20 1A4722808.30.20

1A4721908.27.20

Compulsory accessories

Installation kits



nipolar wire - 6 m				Not included
	1 Piece - Max 60V DC	Max 3 modules	1A4730000.00.00	

MAGIA Michele Groppi / 2023

Compulsory accessories

Suspension kits



Recessed susper	sion kit for 12,5 mm plasterboard	Not included
Matt White	For elettrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000300.02.00
Matt Black	For elettrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000400.02.00



Ceiling suspension	kit	Not included
Matt White	For elettrical cables - 1 Piece	1X0010300.02.00
Matt Black	For elettrical cables - 1 Piece	1X0010400.02.00

Optional accessories

Suspension kits



Wall adapter plate			Not included
Matt White	For mounting on brick masonry walls	1X0050300.01.00	

Drivers



Driver				Not included
100-240V	24V/50W/IP20/ON/OFF	Max 1 module	1Z1120490	








Driver				Not included
100-240V	24V/150W/IP67/1-10V	Max 6 modules	1Z1120500	




Dimmable controller			Not included
	DALI - PUSH - 0/1-10V - TRIAC - IP20	1Z0000034	







Example of single installation with recessed suspension kit




Example of multiple installation with recessed suspension kit




Example of single installation with ceiling suspension kit



Example of multiple installation with ceiling suspension kit

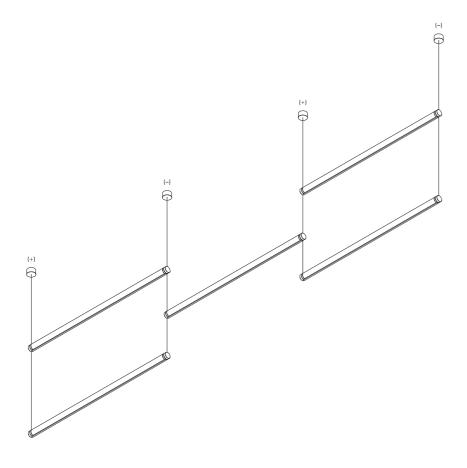

Example of multiple installation | Max 3 tubes for cable



Suspension / Direct / Indoor

Material Metal

Finish .03 Matt White .04 Matt Black .08 Brushed Brass .26 Total Black

Note

Suspension luminaire. Matt white rose and white cable for the matt white and matt black finish. Matt black rose and black cable for the total black and brushed brass finish. Single rose for more than one lamp on request. MISS 2: plasterboard version with magnetic fixing flat rose.

000 × 155

MISS 1

Ceiling driver version 5,6W 220V - 50/60Hz 2700K - 290lm / 3000K - 310lm CRI >90 Driver integrated ON/OFF Matt White - 2700K - ON/OFF
Matt White - 3000K - ON/OFF
Matt Black - 2700K - ON/OFF
Matt Black - 3000K - ON/OFF
Brushed Brass - 2700K - ON/OFF
Brushed Brass - 3000K - ON/OFF
Total Black - 2700K - ON/OFF
Total Black - 3000K - ON/OFF

1A2960308.27.00 1A2960308.30.00 1A2960408.27.00 1A2960408.30.00 1A2960808.27.00 1A2960808.30.00 1A2962608.27.00 1A2962608.30.00



MISS 1

@ IP20

@ IP20

Ceiling driver version 6W 220V - 50Hz 2700K - 290Im / 3000K - 310Im CRI >90 Driver integrated DALI Matt White - 2700K - DALI
Matt White - 3000K - DALI
Matt Black - 2700K - DALI
Matt Black - 3000K - DALI
Brushed Brass - 2700K - DALI
Brushed Brass - 3000K - DALI
Total Black - 2700K - DALI
Total Black - 3000K - DALI

1A2960308.27.01 1A2960308.30.01 1A2960408.27.01 1A2960408.30.01 1A2960808.27.01 1A2960808.30.01 1A2962608.27.01 1A2962608.30.01



MISS 2 Remote driver version 4W Max 350mA DC 2700K - 290lm / 3000K - 310lm CRI >90

Driver not included

Matt Black - 2700K Matt Black - 3000K Brushed Brass - 2700K Brushed Brass - 3000K Total Black - 2700K Total Black - 3000K

Matt White - 2700K

Matt White - 3000K

1A2970308.27.20 1A2970308.30.20 1A2970408.27.20 1A2970408.30.20 1A2970808.27.20 1A2970808.30.20 1A2972608.27.20 1A2972608.30.20

Optional accessories

Suspension kits



Decentralization kit			Not included
	MISS 1	1A0360000.00.00	



Kit ceiling rose and decentralizer			Not included
Matt White	White cable 3 m included	MISS 1	1A0770300.00.00
Matt Black	Black cable 3 m included	MISS 1	1A0770400.00.00

Drivers




Driver				Not included
220-240V(100-127V)	350mA/17W(15W)/IP20/DALI	MISS 2	1Z0240860.350	
_				



Driver				Not include
220-240V(100-127V)	350mA/18W(15W)/IP20/PUSH	MISS 2	1Z0240840.350	



Davide Groppi / 2005



120 8: ₽

780

1200

120 1 9 :8

120 . | • ⊕ • ≅

Suspension / Diffuse / Indoor

Material Japanese paper - PE

Finish .00 Standard

Note

Suspension luminaire. PE and Japanese paper shade. Matt white rose. AISI 304 stainless steel suspension cable. White cable. Compulsory moisture barrier bag packaging for air and sea shipping. MOON 60 DE: version with dual emission and on/off. Transparent cable.

120.

MOON 60

Max 15W - E27 220V - 50Hz 0N/0FF Bulb not included

@ IP20

288 :: 9

MOON 60 DE

Dual emission Max 15W - E27 220V - 50Hz

ON/OFF Bulb not included

@ IP20

Standard - ON/OFF

Standard - ON/OFF

1A2830008.00.00

1A2820008.00.00

MOON 80

Max 15W - E27 220V - 50Hz ON/OFF

Bulb not included

@ IP20

Standard - ON/OFF

1A2840008.00.00

MOON 120

Max 2x25W - E27 220V - 50Hz 0N/0FF

Bulb not included

@ IP20

Standard - ON/OFF

1A2850008.00.00

MOON 200

Max 4x25W - E27 220V - 50Hz 0N/0FF Bulb not included

Transport excluded

(CC) IP20

Standard - ON/OFF

1A2860008.00.00

MOON Davide Groppi / 2005

ries

Bulbs

_	1
8	
	V

LED - GU10 - PAR16				Not included
	220-240V - 5,5W - 25° 3000K - 375lm - CRI >97 Energy Efficiency G - Dimmable	MOON 60 DE	1Y0330500	



LED - E27 - A60			Not included
	220-240V - 11,2W - 360° 2700K - 1521lm - CRI >90 Energy Efficiency D - Dimmable	MOON 60 / MOON 60 DE / 1Y0330790 MOON 80 / MOON 200	



LED - E27 - A150				Not included
	220-240V - 20W - 200° 2700K - 2452Im - CRI >80 Energy Efficiency E - Dimmable	MOON 120	1Y2160020	

Suspension kits



Sloped rose suspension kit		Not included
Nickel plated - 1 Piece	MOON 60 / MOON 60 DE / 1A0520000.00.00 MOON 80	











Kit ceiling rose and decentralizer		Not included
Matt White	White cable 3 m included	1A0770300.00.00
Matt Black	Black cable 3 m included	1A0770400.00.00


Davide Groppi / 2005 MOON

Optional accessories

Other accessories

Moisture barrier bag				Not included
	Packaging for air and sea shipping	MOON 60 / MOON 60 DE	4A2820010	
Moisture barrier bag				Not included
	Packaging for air and sea shipping	MOON 80	4A2840010	
Moisture barrier bag				Not included
	Packaging for air and sea shipping	MOON 120	49860020	
Moisture barrier bag				Not included
	Packaging for air and sea shipping	MOON 200	48780030	
Wooden crate				Not included
	Packaging for air and sea shipping	MOON 120	49860010	
Wooden crate				Not included
	Packaging for air and sea shipping	MOON 200	48780020	





NEURO Davide Groppi - Beppe Merlano / 2013


Suspension / Direct / Indoor

Material Metal

Finish .03 Matt White .04 Matt Black

Note

Suspension luminaire. Five cable clips included. Matt white cable clips and white cable for the matt white finish. Matt black cable clips and black cable for the matt black finish.



NEURO

Max 15W - E27 220V - 50/60Hz ON/OFF Bulb not included

Matt White - ON/OFF Matt Black - ON/OFF 1A0160308.00.00 1A0160408.00.00

Optional accessories

Installation kits



Wall and ceiling rose	Not included
Matt White	1A3440300.00.00
Matt Black	1A3440400.00.00



	Included
1 Piece	1A3270300.00.00
1 Piece	1A3270400.00.00

Bulbs




LED - E27 - PAR30s		!	Not included
	220-240V - 9,5W - 25°	1Y0330730	
	3000K - 760lm - CRI >80		
	Energy Efficiency F - Dimmable		





Michele Groppi / 2023



REFLEX S

Michele Groppi / 2023

Michele Groppi / 2023


REFLEX S

Suspension / Indirect / Indoor

Material Metal - Mirror
Finish .04 Matt Black

Note Suspension luminaire. Plane with mirror finish. Matt black rear plane. Matt

white rose. AISI 304 stainless steel suspension cables. Black cable.



REFLEX S 2

Remote driver version

49W

Max 500mA DC

2700K - 5787lm / 3000K - 6156lm

CRI >90

Driver not included

Matt Black - 2700K Matt Black - 3000K

1A4790408.27.20 1A4790408.30.20

Optional accessories

Suspension kits



Recessed susper	nsion kit for 12,5 mm plasterboard	Not included
Matt White	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000300.01.00
Matt Black	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000400.01.00
Matt White	For elettrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000300.04.00
Matt Black	For elettrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000400.04.00



Ceiling suspension	on kit	Not included
Matt White	For suspension cables - 1 Piece	1X0010300.01.00
Matt Black	For suspension cables - 1 Piece	1X0010400.01.00
Matt White	For elettrical cables - 1 Piece	1X0010300.04.00
Matt Black	For elettrical cables - 1 Piece	1X0010400.04.00



Wall adapter plate		No	t included
Matt White	For mounting on brick masonry walls	1X0050300.01.00	

Drivers



Driver			Not included
220-240V(100-127V)	1000mA/60W(40W)/IP20/DALI	1Z0241140.1000	



Davide Groppi / 2013

The smallest possible shape. A suspended luminous segment. Beautiful by itself or in composition. Suitable for working area or kitchen. SHANGHAI

Davide Groppi / 2013

1A3260308.27.04

1A3260308.30.04

1A3260808.27.04

1A3260808.30.04

SHANGHAI Davide Groppi / 2013

Suspension kits

Optional accessories



Sloped ceiling suspension hook	Not included
Chrome plated - 1 Piece	1A0530000.00.00



Recessed susper	nsion kit for 12,5 mm plasterboard			Not included
Matt White	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm		1X0000300.01.00	
Matt Black	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm		1X0000400.01.00	
Matt White	For elettrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	SHANGHAI 2	1X0000300.04.00	
Matt Black	For elettrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	SHANGHAI 2	1X0000400.04.00	



Ceiling suspension	on kit			Not included
Matt White	For suspension cables - 1 Piece		1X0010300.01.00	
Matt Black	For suspension cables - 1 Piece		1X0010400.01.00	
Matt White	For elettrical cables - 1 Piece	SHANGHAI 2	1X0010300.04.00	
Matt Black	For elettrical cables - 1 Piece	SHANGHAI 2	1X0010400.04.00	



Wall adapter plate			Not included
Matt White	For mounting on brick masonry walls	1X0050300.01.00	

Drivers



220-240V(100-127V)	24V/22W(12W)/IP20/ON/OFF	SHANGHAI 2	1Z0240410	




Dimmable controller				Not included
	DALI - PUSH - 0/1-10V - TRIAC - IP20	SHANGHAI 2	1Z0000034	

Suspension / Direct / Indoor

Material Metal - Methacrylate

.03 Matt White Finish .08 Brushed Brass

Note Suspension luminaire. Matt white rose. AISI 304 stainless steel suspension cables. Transparent cable.



SHANGHAI 1

Ceiling driver version 15W

220V - 50/60Hz

2700K - 592lm / 3000K - 619lm

CRI >90

Driver integrated

@ IP20





Remote driver version

13W 24V DC

2700K - 592lm / 3000K - 619lm CRI >90 Driver not included

1A3260308.27.20 Matt White - 2700K 1A3260308.30.20 Matt White - 3000K 1A3260808.27.20 Brushed Brass - 2700K Brushed Brass - 3000K 1A3260808.30.20

Matt White - 2700K - PUSH

Matt White - 3000K - PUSH

Brushed Brass - 2700K - PUSH

Brushed Brass - 3000K - PUSH

144

Not included



A de-structured chandelier that can be re-assembled as you like.

A conjuring trick that gives you the possibility of connecting the diodes in series using very weak electric currents with wires that are practically invisible.

The very thin wire that connects the light sources and brings them alive, one in relation to the other, is the principal component of this project.

SIMBIOSI Davide Groppi / 2015

Suspension / Direct / Indoor


Material Metal

Finish .03 Matt White .26 Total Black

Note

Suspension luminaire. Matt white rose and red cables for the matt white finish. Matt black rose and anthracite grey cables for the matt black finish.

AISI 304 stainless steel suspension cables.



SIMBIOSI

15W

220V - 50/60Hz

2700K - 931lm / 3000K - 960lm

CRI >90

Driver integrated PUSH

@ IP20


Matt White - 2700K - PUSH	1A2870308.27.04
Matt White - 3000K - PUSH	1A2870308.30.04
Total Black - 2700K - PUSH	1A2872608.27.04
Total Black - 3000K - PUSH	1A2872608.30.04


Optional accessories

Suspension kits



Sloped ceiling suspension hook	Not included
Chrome plated - 1 Piece	1A0530000.00.00

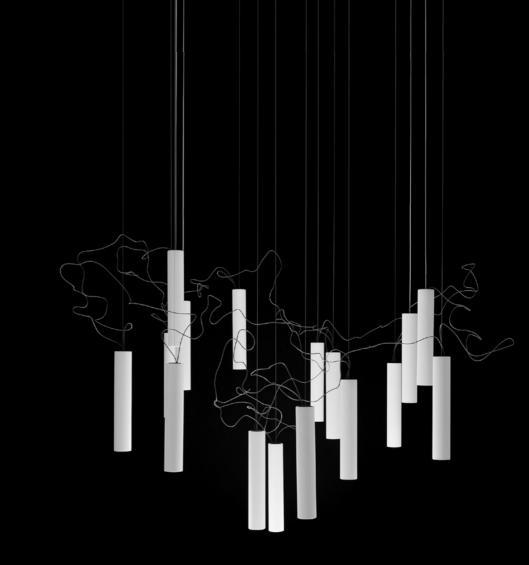



SOTTILE

Davide Groppi / 2023

Davide Groppi / 2023


Suspension / Direct / Indoor

Material Metal

Finish .29 Brushed Bronze .36 Brushed Black

Note Suspension luminaire. Matt white rose. AISI 304 stainless steel suspension

cable. Black cable.




SOTTILE 2

Remote driver version
19W
24V DC
2700K - 1692lm / 3000K - 1855lm
CRI >90
Driver not included

P20

Brushed Bronze - 2700K 1A4232908.27.20 Brushed Bronze - 3000K 1A4232908.30.20 Brushed Black - 2700K 1A4233608.27.20 Brushed Black - 3000K 1A4233608.30.20



SOTTILE 2 DE

Remote driver version - Dual emission 2x19W 24V DC 2700K - Up 1692lm - Down 1692lm / 3000K - Up 1855lm - Down 1855lm CRI >90 Driver not included

 Brushed Bronze - 2700K
 1A4642908.27.20

 Brushed Bronze - 3000K
 1A4642908.30.20

 Brushed Black - 2700K
 1A4643608.27.20

 Brushed Black - 3000K
 1A4643608.30.20

Optional accessories

Suspension kits



Recessed susper	Recessed suspension kit for 12,5 mm plasterboard	
Matt White	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000300.01.00
Matt Black	For suspension cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000400.01.00
Matt White	For elettrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000300.04.00
Matt Black	For elettrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000400.04.00



Ceiling suspension kit		Not included
Matt White	For suspension cables - 1 Piece	1X0010300.01.00
Matt Black	For suspension cables - 1 Piece	1X0010400.01.00
Matt White	For elettrical cables - 1 Piece	1X0010300.04.00
Matt Black	For elettrical cables - 1 Piece	1X0010400.04.00



Wall adapter plate			Not included
Matt White	For mounting on brick masonry walls	1X0050300.01.00	

Drivers





Driver		Not included
100-240V	24V/50W/IP20/ON/OFF	1Z1120490

Dimmable controller	Not included
DALI - PUSH - 0/1-10V - TRIAC - IP20	1Z0000034



Davide Groppi / 2023

The purity of the suspended cone encases a small light machine that produces direct, indirect and diffused light at the same time.

Sottosopra: pure, elegant, wonderfully efficient.

SOTTOSOPRA Davide Groppi / 2023


Suspension / Direct-Indirect / Indoor

Material Metal

Finish .03 Matt White

Note Suspension luminaire. Matt white rose. Dual emission and on/off. White

cable. SOTTOSOPRA 2: version with power cable only and without rose.



SOTTOSOPRA 2

Remote driver version 30W Max 500mA DC

2700K - Down 228lm - Up 1827lm /

3000K - Down 245lm - Up 1876lm

CRI >90 UGR <19

Driver not included 2 Drivers required

Matt White - 2700K Matt White - 3000K 1A4540308.27.20 1A4540308.30.20

Optional accessories

Suspension kits



Recessed susper	nsion kit for 12,5 mm plasterboard	Not included
Matt White	For elettrical cables - 1 Piece Plasterboard cut-out Ø 44 mm	1X0000300.05.00
	Minimum space for mounting 70 mm	
Matt Black	For elettrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000400.05.00

Drivers



Driver		Not included
220-240V(110-127V)	500mA/25W(13,5W)/IP20/DALI - PUSH - 1-10V	1Z0241270.500



WALL



A tool to light.

A luminaire designed for use with state-of-the-art LED modules to offer superior performance and a wide range of light beams.

Wall-Ceiling / Direct / Indoor

Material Metal

Finish .03 Matt White .04 Matt Black

Note Wall luminaire. Adjustable in all directions.



DOT P 51

Max 10W - GU10 220V - 50/60Hz

ON/OFF

Bulb not included

@ IP20

Matt White - ON/OFF Matt Black - ON/OFF 1A2490308.00.00 1A2490408.00.00 Optional accessories

Bulbs

	_/
- e	
•	_
	\neg

LED - GU10 - PAR16				Not included
	220-240V - 5,5W - 25° 3000K - 375lm - CRI >97 Energy Efficiency G - Dimmable	DOT P 51	1Y0330500	



LED SORAA - GU10 - MR16			Not included
230V - 7,5W - 10° 2700K - 390lm - CRI >95 Energy Efficiency G - Dimmable	DOT P 51	1Y1580210	



LED SORAA - GU10 - MR16			Not included
230V - 7,5W - 10° 3000K - 410lm - CRI >95 Energy Efficiency G - Dimmable	DOT P 51	1Y1580010	

Other accessories



Darklight				Not included
	LED SORAA - GU10 - MR16	LED SORAA - GU10	1Y1580040	





36° beam filter				Not included
	LED SORAA - GU10 - MR16	LED SORAA - GU10	1Y1580030	



Harry Thaler / 2014

A gestural project, full of irony and nostalgia.

Therefore, among a thousand stories, prohibitions, absurd technical rules, we have reached the end. The end of the incandescent bulb.

Edison's Nightmare is a salute to Edison's light bulb', a dream that changed the way we live forever, stealing time to read and write from sleep.

It is a classic light bulb, nailed to the wall. Like a work of art.

* From 01 September 2012, incandescent bulbs cannot be sold in the EU.

EDISON'S NIGHTMARE

Harry Thaler / 2014

Wall / Diffuse / Indoor

Material Blown glass - Metal
Finish .00 Standard

Note Wall luminaire. Blown glass diffuser. Dimmer on the cable. Transparent

cable



EDISON'S NIGHTMARE

Standard

1A3380008.00.20

Optional accessories

Drivers



Driver		Not included
100-240V	12V/20W/IP20/1-10V	1Z0240900





Alessandra Dallagiovanna - Davide Groppi / 2010

A luminous short film.

Telling a story in light, a series of old 35MM slides are lit from behind, pulsating and shown at random.

The photographs can be assembled and replaced as you like.


The choice of the message to be communicated is completely personal: it can be an image, a logo, a sentence, anything you want to represent, at any time. The light message is punctuated by a blinking LED, offering reading in movement.

Objects-Wall / Diffuse / Indoor

Metal - Polycarbonate Material

Finish .00 Standard

Modular wall luminaire. Matt black support. Customised images not included. Module connector included. Black cable. Note



5V DC

Driver not included

Standard

1A3410008.00.20

Optional accessories

Drivers



Driver with plug			Not included
Matt Black	Input 110-240V - 50/60Hz Output 5V DC - 2A - 10W - IP20	1Z0000088	

Other accessories



USB to JACK 2.1 cable	Not included
Lenght 0,9m	1Z0280880



MIRA Omar Carraglia / 2012

Wall-Ceiling / Direct / Indoor

Material Metal

.03 Matt White Finish .04 Matt Black

Note Wall luminaire. Adjustable in all directions.

MIRA SWITCH

8W

220V - 50Hz

2700K - 327lm / 3000K - 352lm


CRI >90

Driver integrated

ON/OFF IP20

Matt White - 2700K - ON/OFF Matt White - 3000K - ON/OFF Matt Black - 2700K - ON/OFF Matt Black - 3000K - ON/OFF

1A2280308.27.00 1A2280308.30.00 1A2280408.27.00 1A2280408.30.00



MIRA

8W

220V - 50Hz

2700K - 327lm / 3000K - 352lm

CRI >90 Driver integrated

DALI @ IP20 Matt White - 2700K - DALI Matt White - 3000K - DALI Matt Black - 2700K - DALI Matt Black - 3000K - DALI

1A2280308.27.01 1A2280308.30.01 1A2280408.27.01 1A2280408.30.01 Omar Carraglia / 2012

MIRA

8W

220V - 50Hz 2700K - 327lm / 3000K - 352lm

CRI >90

Driver integrated PUSH

@ IP20

MIRA

1A2280308.27.04 Matt White - 2700K - PUSH 1A2280308.30.04 Matt White - 3000K - PUSH Matt Black - 2700K - PUSH 1A2280408.27.04 1A2280408.30.04 Matt Black - 3000K - PUSH

MIRA MAGNETIC Omar Carraglia / 2015



Lamp with a simple and essential shape. For interiors and adjustable, it is designed with a magnetic application system to be even more versatile and functional.


MIRA MAGNETIC Omar Carraglia / 2015

Wall-Ceiling / Direct / Indoor

Metal Material

.03 Matt White Finish .04 Matt Black

Wall luminaire. Adjustable in all directions. Magnetic fixing. Dimmer on the cable. White cable. Note



MIRA MAGNETIC

Driver not included

IVIIKA IVIAGNETIC		
5,6W	Matt White - 2700K	1A3680308.27.20
Max 500mA DC	Matt White - 3000K	1A3680308.30.20
2700K - 327lm / 3000K - 352lm	Matt Black - 2700K	1A3680408.27.20
CRI >90	Matt Black - 3000K	1A3680408.30.20

Optional accessories

Drivers



Driver with plug		Not included
Matt Black	Input 220V - 50Hz Output 350mA - 15W - IP20 Dimmer on board	1A3180408.00.06
Matt White	Input 220V - 50Hz Output 350mA - 15W - IP20 Dimmer on board	1A3180308.00.06




Driver			Not included
220-240V(100-127V)	500mA/20W(15W)/IP20/PUSH	1Z0240840.500	





Davide Groppi / 2019



MORSETTO P Davide Groppi / 2019


Wall / Direct / Indoor

Material Metal

.04 Matt Black Finish

Note Wall luminaire. Adjustable in all directions. Dimmer on the cable.

Black cable.



MORSETTO P

24V DC

2700K - 700lm / 3000K - 753lm

CRI >90 UGR <19

Dimmer on board


Driver with plug not included

Matt Black - 2700K - Dimmer on board Matt Black - 3000K - Dimmer on board

1A2570408.27.06 1A2570408.30.06


Optional accessories

Drivers



Driver with plug		Not include	
Matt Black	Input 110-240V - 50/60Hz	1Z0431020	
	Output 24V DC - 18W - IP20		



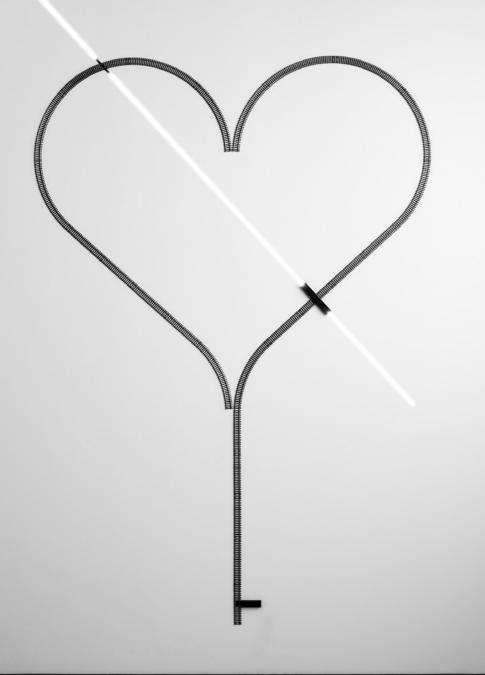

A ready-made project to design the space with a sense of irony and weightlessness. The tracks of an electric train can be used to draw a heart, but also to conduct electricity.

Rail is the boundary between usefulness and show, between art and design.

RAIL Davide Groppi / 2019


Wall / Direct / Indoor

ABS - Metal Material .00 Standard Finish

Wall luminaire. Matt black modular tracks. Dimmer on the cable. Note

> Driver included

Black cable.



RAIL 22W 24V DC 3000K - 2000lm Standard - 3000K CRI >90 Driver not included


1A3400008.30.20

Optional accessories

Drivers




Driver		Not included
110-240V	24V/25W/IP67/ON/OFF	1Z1120620

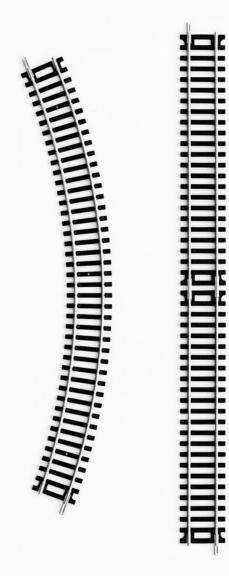



Michele Groppi / 2022






REFLEX Michele Groppi / 2022

Wall / Indirect / Indoor

Metal - Mirror Material .04 Matt Black Finish

Wall luminaire. Plane with mirror finish. Matt black rear plane. Note



REFLEX

18W 24V DC

2700K - 2158lm / 3000K - 2320lm

CRI >90


Driver not included

Matt Black - 2700K Matt Black - 3000K 1A0850408.27.20

1A0850408.30.20

Optional accessories

Drivers




Not included Driver 100-240V 24V/60W/IP67/1-10V 1Z1120260



Dimmable controller			Not included
	DALI - PUSH - 0/1-10V - TRIAC - IP20	1Z0000034	



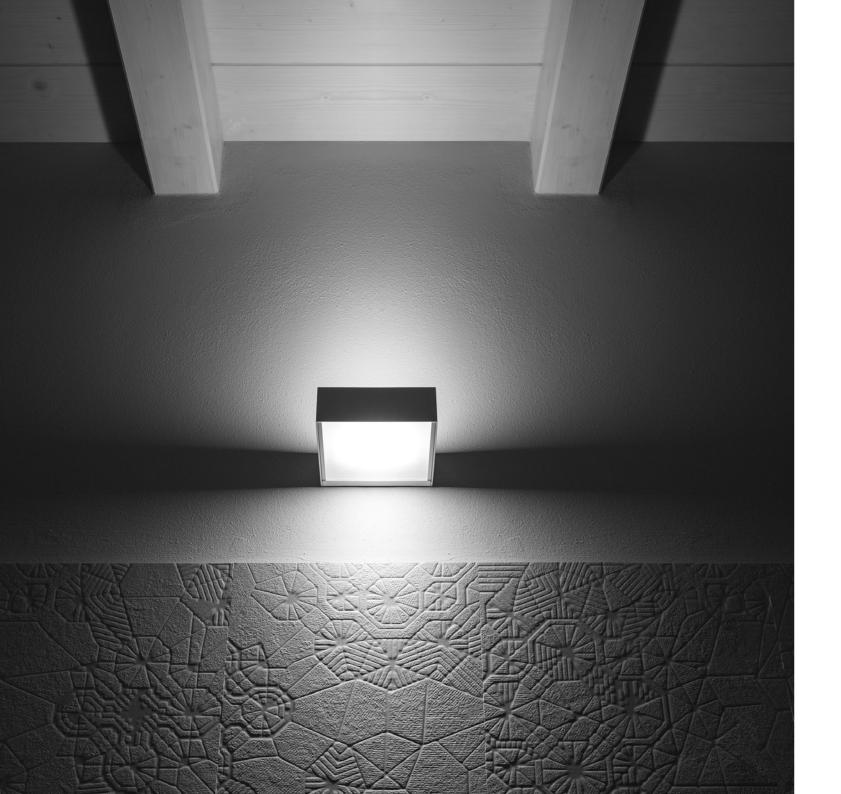

The luminaire is pure form, a simple container for the light source. Light is incorporated into the space, becoming an architectural element. TOAST

Davide Groppi - Alberto Zattin / 2001

Wall / Diffuse / Indoor

Material Glass - Metal

Finish .01 Polished Chrome .03 Matt White .04 Matt Black .08 Brushed Brass

.14 Brushed Chrome

Note Wall luminaire. Dual emission.



TOAST

Max 100W - R7s 220V - 50/60Hz

ON/OFF

Bulb not included

⋘ |P20 (] 0.5 m |

Polished Chrome - ON/OFF

Matt White - ON/OFF Matt Black - ON/OFF

Brushed Brass - ON/OFF Brushed Chrome - ON/OFF 1A3290308.00.00 1A3290408.00.00 1A3290808.00.00

1A3290108.00.00

1A3291408.00.00



CEILING



Davide Groppi / 2023

Abstraction, purity, graphic sign.
The projected reduction of Infinito.
The disc appears enigmatic, the symbolic presence of the absence of light.


ASINTOTO Davide Groppi / 2023

Ceiling / Indirect / Indoor

Material Metal - Methacrylate
Finish .27 Gravity Black

Note Ceiling luminaire. Disc with gravity black finish. Magnetic weight available

for disc tilting. Black cable.



ASINTOTO

18W

Max 500mA DC

2700K - 1435lm / 3000K - 1478lm

CRI >90

Driver not included

Gravity Black - 2700K Gravity Black - 3000K

1A4072708.27.20 1A4072708.30.20 Davide Groppi / 2023

Optional accessories

Installation kits



Circular plasterboard panel 12,5 mm		Not included
Standard	Cut-out 400x400 mm	1A4520000.00.00
	Minimum space for mounting Ø 115 mm	

ASINTOTO

Suspension kits



Recessed suspension kit for 12,5 mm plasterboard		Not included
Matt White	For elettrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000300.04.00
Matt Black	For elettrical cables - 1 Piece Plasterboard cut-out Ø 44 mm Minimum space for mounting 70 mm	1X0000400.04.00



on kit	Not included
For elettrical cables - 1 Piece	1X0010300.04.00
For elettrical cables - 1 Piece	1X0010400.04.00
	For elettrical cables - 1 Piece



Wall adapter plate			Not included
Matt White	For mounting on brick masonry walls	1X0050300.01.00	

Drivers



Driver		Not	included
220-240V(100-127V)	500mA/35W(35W)/IP20/DALI	1Z0241140.500	

Other accessories



Magnetic weight			Not included
Matt Black	For sloped installation	1A4710400.00.00	

RECESSED



Omar Carraglia - Davide Groppi / 2015



A tool to light.

A luminaire designed for use with state-of-the-art LED modules to offer superior performance and a wide range of light beams.

Material Metal

Finish .03 Matt White .04 Matt Black

Note Recessed luminaire. Adjustable in all directions. Plasterboard hole: 40x40

mm. Minimum space for recessed installation: 85 mm.



DOT R		
13W	Matt White - 2700K	1A4770308.27.20
Max 350mA DC	Matt White - 3000K	1A4770308.30.20
2700K / 3000K	Matt Black - 2700K	1A4770408.27.20
CRI >97	Matt Black - 3000K	1A4770408.30.20
Driver not included		

Compulsory accessories

Other accessories



Lens		Not included
Beam - 14°	2700K - CRI >97 - 983lm	1A3090000.00.00
	3000K - CRI >97 - 1038lm	
Beam - 24°	2700K - CRI >97 - 943lm	1A3100000.00
	3000K - CRI >97 - 996lm	
Beam - 36°	2700K - CRI >97 - 955lm	1A3110000.00.00
	3000K - CRI >97 - 1005lm	
Beam - 50°	2700K - CRI >97 - 965lm	1A3120000.00
	3000K - CRI >97 - 1016lm	

Optional accessories

Drivers



Omar Carraglia - Davide Groppi / 2015

Driver			Not included
220-240V(100-127V)	350mA/17W(15W)/IP20/DALI	1Z0240860.350	



Driver			Not included
220-240V(100-127V)	350mA/18W(15W)/IP20/PUSH	1Z0240840.350	



Driver		Not include
220-240V	350mA/18W/IP20/TRIAC/IGBT	1Z0240740

Other accessories



Accessory holder + Honeycomb louvre	Not included
	1X0080400.01.00



Elliptical filter		Not included
Standard	Compulsory with 1X0080400.01.00	1X0080000.02.00



Blue filter		Not included
Standard	Compulsory with 1X0080400.01.00	1X0080000.03.00



Red filter		Not included
Standard	Compulsory with 1X0080400.01.00	1X0080000.04.00



ellow filter			Not included
tandard	Compulsory with 1X0080400.01.00	1X0080000.05.00	_



Omar Carraglia / 2015

A tool to light.

The luminaire is pure form, a simple container for the light source.

Light is incorporated into the space, becoming an architectural element.

MIRA R Omar Carraglia / 2015

Recessed / Direct / Indoor

Material Metal

.03 Matt White Finish .04 Matt Black

Note Recessed luminaire. Adjustable in all directions. Plasterboard hole:

40x40 mm. Minimum space for recessed installation: 85 mm.



MIRA R

5,6W

Max 500mA DC

2700K - 327lm / 3000K - 352lm

CRI >90

Driver not included

Matt White - 2700K Matt White - 3000K

Matt Black - 3000K

Matt Black - 2700K

1A3690408.30.20 1A3690408.27.20

1A3690308.27.20

1A3690308.30.20

Optional accessories

Drivers



Driver Not included 220-240V(100-127V) 500mA/20W(15W)/IP20/DALI 1Z0240860.500



Driver Not included 220-240V(100-127V) 500mA/20W(15W)/IP20/PUSH 1Z0240840.500



An extreme expression of subtraction, uniting optics and electronics as an answer to the ultimate challenge: the absence of structural support and the essence of light.

Nulla is a project that represents both the beginning and end of our work on light. It's the beginning, in the sense that we have always been looking for absolute light, one coming from a distance, almost without a source. It's the end in that every time we look at Nulla, we feel as though we can't get it better than that.

Nulla generates light and propagates mystery. Nulla is the most generous of our lamps.

Its sole objective is to hide and give all the attention to whatever it is lighting.

What we see is only a tiny black hole, as if it were drawn on the ceiling.

A circle in the ceiling hiding a very bright LED and lens to project the light.

XXIII Compasso d'Oro ADI Award, 2014



NULLA Davide Groppi / 2010 Davide Groppi / 2010

Recessed / Direct / Indoor

Material Metal

Finish .00 Standard

Note Recessed luminaire. Visible 18 / 25 mm diameter hole. NULLA 18 and

NULLA 25: lamp extractable for maintenance.



NULLA - 23°

14W

24V DC

2700K - 425lm / 3000K - 458lm

CRI >90 Beam 23° UGR <19

Driver not included



NULLA - 32°

14W 24V DC

2700K - 538lm / 3000K - 579lm

CRI >90 Beam 32° UGR <19

Driver not included

Standard - 2700K Standard - 3000K

1A4100008.27.20 1A4100008.30.20

Standard - 2700K Standard - 3000K 1A2110008.27.20 1A2110008.30.20

NULLA 18 - 20°

4,5W 24V DC

2700K - 174lm / 3000K - 186lm

CRI >90 Beam 20° UGR <19

Driver not included

1A2010008.27.20 1A2010008.30.20 NULLA

. 441

NULLA 25 - 23°

9W

24V DC

2700K - 304lm / 3000K - 327lm

CRI >90 Beam 23°

UGR <19

Driver not included

Standard - 2700K Standard - 3000K

Standard - 2700K

Standard - 3000K

1A2020008.27.20 1A4080008.30.20

ocumano.

NULLA 25 - 32°

24V DC

2700K - 384lm / 3000K - 413lm

CRI >90 Beam 32° UGR <19

Driver not included

Standard - 2700K Standard - 3000K

1A2020008.27.20 1A2020008.30.20

Compulsory accessories

Installation kits



Plasterboard flange 12,5 mm				
Matt Black	Cut-out Ø 21 mm Minimum space for mounting ' IP65	NULLA 100 mm	1A2200400.00.00	



Plasterboard flan	ge 12,5 mm			Not included
Matt Black	Cut-out Ø 22 mm Minimum space for mounting 190 mm	NULLA 18	1A2210400.00.00	



Plasterboard flan	ige 12,5 mm		No	t include
Matt Black	Cut-out Ø 35 mm Minimum space for mounting	NULLA 25 190 mm	1A2170400.00.00	



Plasterboard flange 12,5 mm				
Matt Black	Cut-out Ø 35 mm Minimum space for mounting 14 IP65	NULLA 25 45 mm	1A3980400.00.00	



Plasterboard flan	ge (bottom) ≠ 12,5 mm		l l	Not included
Matt Black	Cut-out Ø 35 mm Minimum space for mounting IP65	NULLA 25 145 mm	1A4960400.00.00	

Davide Groppi / 2010 Optional accessories

Installation kits



Trapdoor for plasterboard 12,5 mm				Not included
Standard	Cut-out 205x205 mm	NULLA	1A3780000.00.00	



Trapdoor for plasterboard 12,5 mm				Not included
Standard	Cut-out 415x415 mm	NULLA	1A3790000.00.00	



Masonry Box			Not included
Standard	NULLA 18	1A2390000.00.00	



Concrete box			Not included
Standard	NULLA 18	1A2240000.00.00	




Standard NULLA 25	1A2380000.00.00





Concrete box			Not included
Standard	NULLA 25	1A2230000.00.00	

Drivers




Driver + Controller		Not included
220-240V(100-127V)	24V/22W(12W)/IP20/TRIAC/IGBT	1Z0240410 +
		1Z0000034

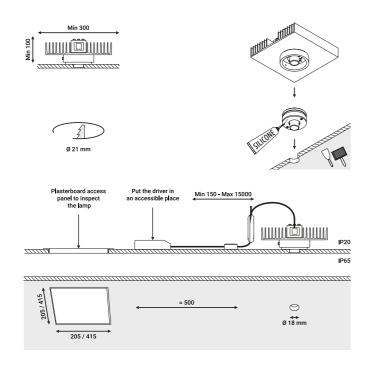


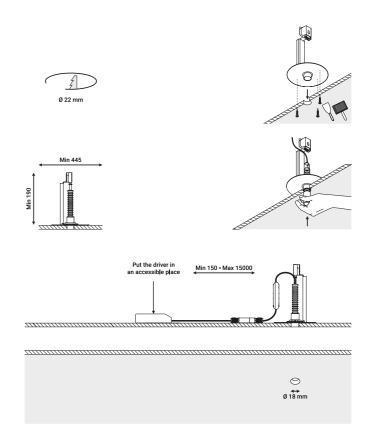


NULLA 18 installation conditions

NULLA 18 installation conditions

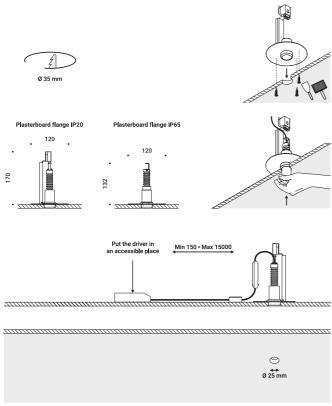

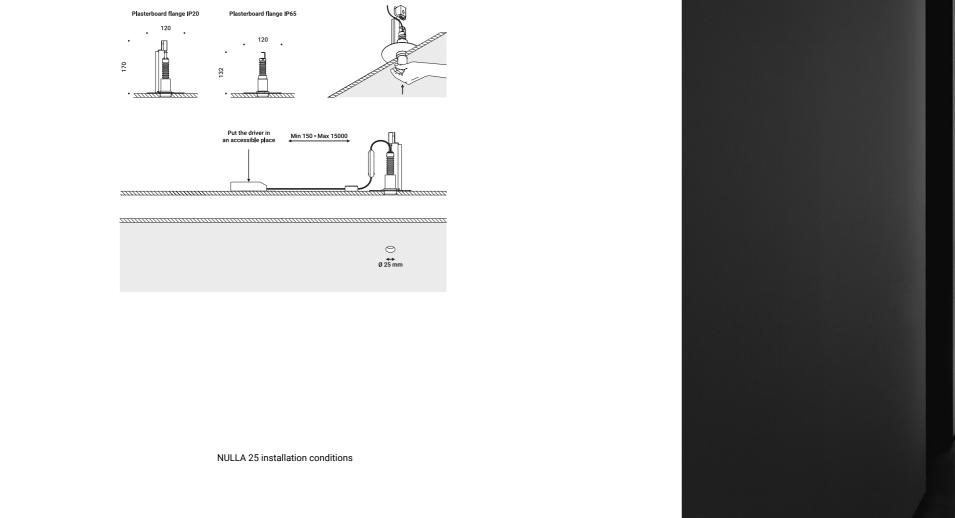

SYSTEMS



Wall-Systems / Direct / Indoor


Metal

Material


Finish .03 Matt White .04 Matt Black

Note

Special stainless steel tape (9 mm) running from wall to wall. Available in 6 / 12 / 18 m with a single power unit and uniform lighting. Available in Dual emission (DE) and Tunable White (TW - 5 / 10 m) versions. LED strip that can be divided every 96,6 mm. DE versions are available with dual on/off (two drivers required).





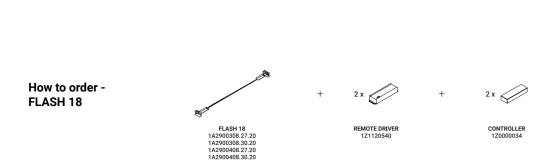











FLASH 6 DE 1A1290308.27.20 1A1290308.30.20 1A1290408.27.20 1A1290408.30.20
 REMOTE DRIVER
 CONTROLLER

 1Z1120540
 1Z0000034







Dual emission
90W
24V DC
2700K - Up 5586lm - Down 5586lm /
3000K - Up 6708lm - Down 6708lm
CRI >90
Driver not included

FLASH 6 DE


Driver not included

 Matt White - 2700K
 1A1290308.27.20

 Matt White - 3000K
 1A1290308.30.20

 Matt Black - 2700K
 1A1290408.27.20

 Matt Black - 3000K
 1A1290408.30.20



FLASH 12 DE

Dual emssion

180W

24V DC

2700K - Up 11172lm - Down 11172lm /
3000K - Up 13416lm - Down 13416lm

CRI > 90

Matt White - 2700K

Matt White - 3000K

Matt Black - 2700K

Matt Black - 3000K

1A1300308.27.20 1A1300308.30.20 1A1300408.27.20 1A1300408.30.20

Note

Tunable White describes the variable colour temperature controls from warm white to cool white light.

How to order -FLASH 5 TW









REMOTE DRIVER 1Z1120540

CONTROLLER 1Z0830880

How to order -FLASH 10 TW





REMOTE DRIVER 1Z1120540








CONTROLLER 1Z0830880

FLASH 5 TW



Tunable White 50W 24V DC 2700K / 6500K - 7650lm CRI >90 Driver not included

Matt White - 2700K / 6500K Matt Black - 2700K / 6500K 1A4820308.96.20 1A4820408.96.20

10000 10000 30. FLASH 10 TW

Tunable White 100W 24V DC 2700K / 6500K - 15300lm

CRI >90 Driver not included

Matt White - 2700K / 6500K Matt Black - 2700K / 6500K 1A4830308.96.20 1A4830408.96.20

Note

Davide Groppi / 2017

Tunable White describes the variable colour temperature controls from warm white to cool white light.

How to order -FLASH 5 DE TW





2 x

REMOTE DRIVER 1Z1120540 CONTROLLER 1Z0830880

How to order -FLASH 10 DE TW




4 x



4 x

REMOTE DRIVER 1Z1120540 CONTROLLER 1Z0830880 FLASH 5 DE TW



Dual emission - Tunable White 100W 24V DC

2700K / 6500K - 15300lm

CRI >90 Driver not included

Matt White - 2700K / 6500K Matt Black - 2700K / 6500K 1A4840308.96.20 1A4840408.96.20

1000

FLASH 10 DE TW

Dual emission - Tunable White 200W 24V DC

2700K / 6500K - 30600lm CRI >90

Driver not included

Matt White - 2700K / 6500K Matt Black - 2700K / 6500K 1A4850308.96.20 1A4850408.96.20 **FLASH**

Davide Groppi / 2017

1A0800400.00.00

Davide Groppi / 2017

Dimmable controller

Optional accessories

Installation kits



Ceiling installation kit	Not included
Matt Black	1A0080400.00.00



Kit wall connection vertical sloped 45°	Not included
Matt Black	1A0120400.00.00



Kit wall connection sloped right 75°	Not included
Matt Black	1A0340400.00.00







Matt Black

Swallows		Not included

Optional accessories

Drivers



Driver			Not included
100-240V	24V/96W/IP67/1-10V	FLASH 6 / FLASH 12 / 1Z1120540)
		FLASH 18 / FLASH 6 DE /	
		FLASH 12 DE /	
		FLASH 5 TW /	
		FLASH 10 TW /	
		FLASH 5 DE TW /	
		FLASH 10 DE TW	

FLASH 6 / FLASH 12 /

FLASH 5 DE TW /

FLASH 10 DE TW

1Z0000034



	FLASH 18 / FLASH 6 FLASH 12 DE	DE /	
Controller Casambi - Tunable White			Not included
	FLASH 5 TW / FLASH 10 TW /	1Z0830880	




DALI - PUSH - 0/1-10V - TRIAC - IP20




FLASH


Not included



Example of installation with remote driver

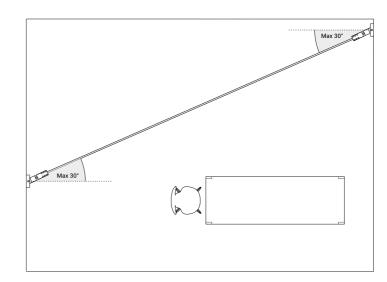


Example of installation with max rotation 30°

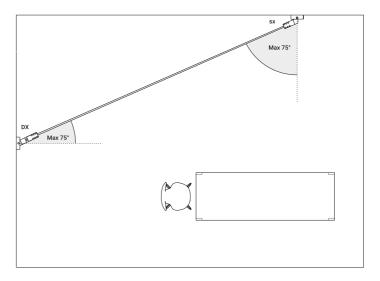


1A0340400.00.00 - 1A0350400.00.00 - Example of installation with kit wall connection sloped 75°


FLASH

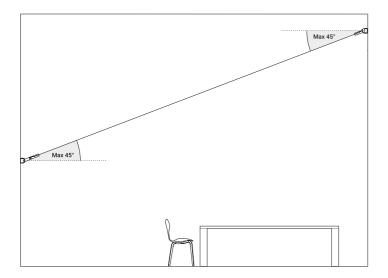

1A0120400.00.00 - Example of installation with kit wall connection vertical sloped 45°

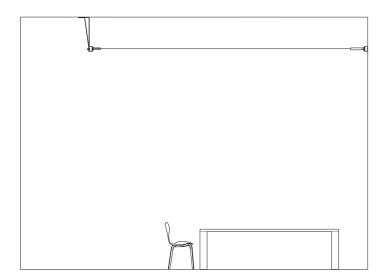

1A0080400.00.00 - Example of installation with ceiling installation kit

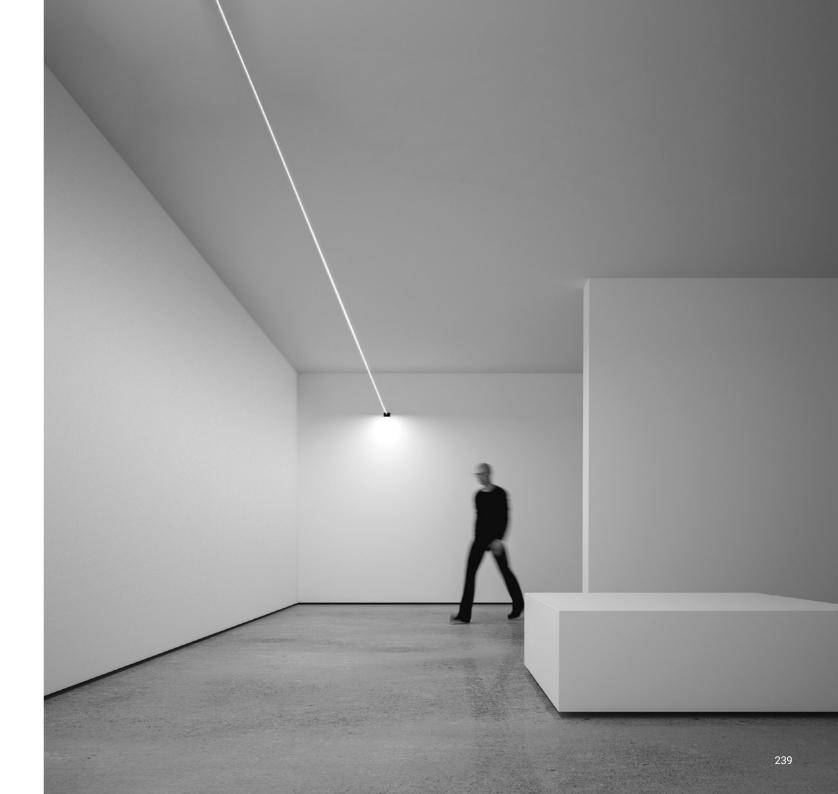

INFINITO

Davide Groppi / 2016

People's Choice AZ Award 2017

A spatial concept, it is continuous light.

An ultra-thin strip of special stainless steel just 18 mm wide "cuts" the space to produce indirect light. Infinito can be adapted to various situations, stretched from wall to wall or ceiling to floor. It comes in strips up to 36 metres in length (standard versions at 6 / 12 / 18 metres in length). Infinito breaks down the luminaire, turning it into something else, leaving only a trace, a line and then not even that, just light. This project pays homage to the art of Lucio Fontana and his spatial concepts.

The graphic force of this system is surprising. It can be integrated into space, but at the same time it becomes part of that space. Infinito: essence and absence.

Archiproducts Design Award 2017

How to order - INFINITO 6

Davide Groppi / 2016
Wall-Systems / Indirect / Indoor

Material

Finish .03 Matt White .04 Matt Black

Metal


Note


Special stainless steel tape (18 mm) stretched from wall to wall. Available in 6 / 12 / 18 m with a single power unit and uniform lighting. Available in Tunable White (TW - 5 / 10 m) version.

LED strip that can be divided every 96,6 mm.





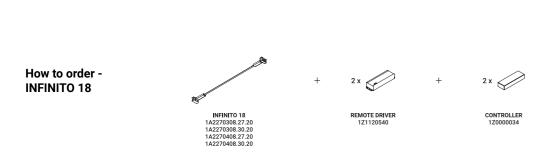

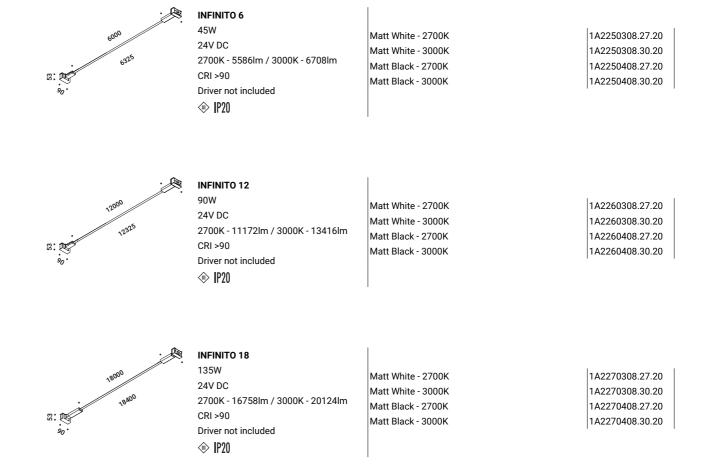

Note

Tunable White describes the variable colour temperature controls from warm white to cool white light.







REMOTE DRIVER 1Z1120540

> REMOTE DRIVER 1Z1120540





CONTROLLER

How to order -INFINITO 10 TW












CONTROLLER 1Z0830880

INFINITO 5 TW



Tunable White
50W
24V DC
2700K / 6500K - 7650lm
CRI >90
Driver not included

Matt White - 2700K / 6500K Matt Black - 2700K / 6500K

1A4860308.96.20 1A4860408.96.20

2: 10000 10000 **INFINITO 10 TW**

Tunable White 100W 24V DC 2700K / 6500K - 15300lm CRI >90

Driver not included

| P20

Matt White - 2700K / 6500K

Matt Black - 2700K / 6500K

1A4870308.96.20

1A4870408.96.20

INFINITO

Optional accessories

Installation kits



Ceiling installation kit	Not included
Matt Black	1A0080400.00.00



Kit wall connection vertical sloped 45°	Not included
Matt Black	1A0120400.00.00



Kit wall connection sloped right 75°	Not included
Matt Black	1A0340400.00.00







Swallows	Not	included
Matt Black	1A0290400.00.00	

Davide Groppi / 2016

Optional accessories

Drivers

Davide Groppi / 2016



Driver			Not included
100-240V	24V/96W/IP67/1-10V	INFINITO 6 / INFINITO 12 / 1Z1120540	
		INFINITO 18 /	
		INFINITO 5 TW /	
		INFINITO 10 TW	


INFINITO




DALI - PUSH - 0/1-10V - TRIAC - IP20 INFINITO 6 / INFINITO 12 / 1Z0000034	Dimmable controller		Not included
INFINITO 18		DALI - PUSH - 0/1-10V - TRIAC - IP20	




Controller Casambi - Tunable White			Not included
	INFINITO 5 TW / INFINITO 10 TW	1Z0830880	



Example of installation with remote driver

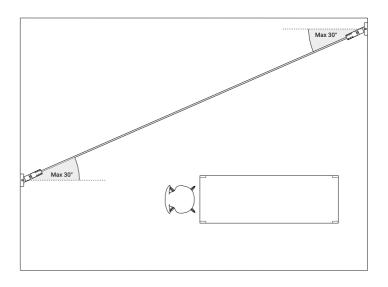


Example of installation with max rotation 30°

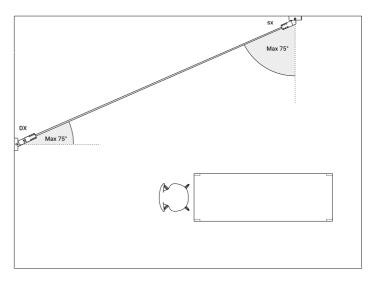


1A0340400.00.00 - 1A0350400.00.00 - Example of installation with kit wall connection sloped 75°

INFINITO Davide Groppi / 2016

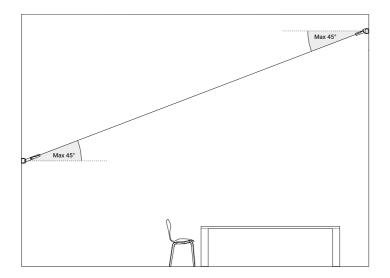

1A0120400.00.00 - Example of installation with kit wall connection vertical sloped 45°

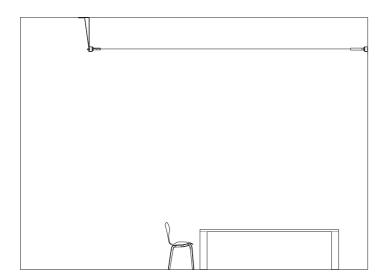

1A0080400.00.00 - Example of installation with ceiling installation kit



Light runs on a wire. An almost imperceptible wire, suspended in space.

Like a tightrope walker on a thin rope, the light reaches everywhere, weightless and wonderful. Ohm is an electro mechanic project that takes maximum advantage of the characteristics of luminous diodes. Its secret is a special unipolar wire stretched from wall to wall. Where the light comes from is discreetly hidden, giving all the attention to what it is illuminating. It is possible to replace the light source even with the luminaire assembled.

Luminaire designed also to be powered by ENDLESS conductive tape.

Selection for ADI Design Index 2020


OHM Davide Groppi / 2019





+ (

TIE RODS 1A3020300.00.00



Davide Groppi / 2019 OHM

Systems / Direct / Indoor

Material Metal - PA

Finish .04 Matt Black

Note Special unipolar wire stretched from wall to wall. Max 4 Spots.



OHM SPOT

3,2W

Max 350mA DC 2700K / 3000K

CRI >95

Driver not included

Matt Black - 2700K Matt Black - 3000K

1A3000408.27.20 1A3000408.30.20

ОНМ

Davide Groppi / 2019

Davide Groppi / 2019

Compulsory accessories

Installation kits



Tie rods		Not include
Matt White	2 Pieces	1A3020300.00.00



Unipolar wire - 12 m	Not included
Max 60V DC	1A3060000.00.00
Unipolar wire - 24 m	Not included
Max 60V DC	1A3070000.00
Unipolar wire - 48 m	Not included
Max 60V DC	1A3080000.00.00

Other accessories



Lens			Not include
Beam - 14°	2700K - CRI >95 - 272lm	OHM SPOT	1A3090000.00.00
	3000K - CRI >95 - 288lm		
Beam - 24°	2700K - CRI >95 - 271lm	OHM SPOT	1A3100000.00.00
	3000K - CRI >95 - 286lm		
Beam - 36°	2700K - CRI >95 - 257lm	OHM SPOT	1A3110000.00.00
	3000K - CRI >95 - 273lm		
Beam - 50°	2700K - CRI >95 - 254lm	OHM SPOT	1A3120000.00.00
	3000K - CRI >95 - 270lm		

Optional accessories

Installation kits



Wall adapter plate			Not included
Matt White	For mounting on brick masonry walls	1A3030300.00.00	



Wire guide			Not included
Matt Black	1 Piece	1A3040400.00.00	




Weight kit for suspension version	Not included
4 Pieces	1A3050000.00.00

Drivers




Driver			Not included
220-240V(100-127V)	350mA/35W(35W)/IP20/DALI - PUSH - 1-10V	1Z0241140.350	



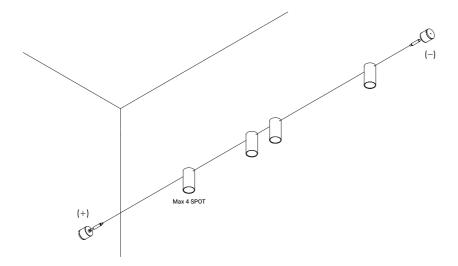

Remote driver version

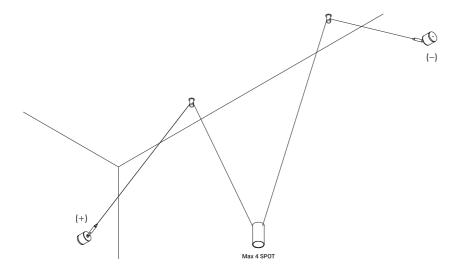

Suspension version





Davide Groppi / 2023

Utopia is a project on the limit state of light, the research for the minimum dimension necessary for pure and essential lighting.

It represents full flexibility, in both its design and its light control.

The light strip reaches into space, bending, breaking and drawing abstract, mysterious patterns.

UTOPIA

Davide Groppi / 2023

UTOPIA Davide Groppi / 2023

Optional accessories

Installation kits



Accessory 1	Not inclu	dec
Polished Chrome	1A4480100.00.00	



Accessory 2	Not included
Polished Chrome	1A4490100.00.00

Drivers



Driver			Not included
100-240V	24V/150W/IP67/1-10V	1Z1120500	




Dimmable controller				Not included
		DALI - PUSH - 0/1-10V - TRIAC - IP20	1Z0000034	

Systems / Indirect / Indoor Material

Metal - PVC .00 Standard Finish

Note Special stainless steel and rubber profile stretched from wall to wall.

Available in 6 / 12 m with a single power unit and uniform lighting.




UTOPIA 6

24V DC

2700K - 6079lm / 3000K - 6322lm

CRI >90

Driver not included



UTOPIA 12

125W 24V DC

CRI >90

Driver not included

Standard - 2700K 2700K - 10133lm / 3000K - 10538lm Standard - 3000K


Standard - 2700K

Standard - 3000K


1A4600008.27.20 1A4600008.30.20

1A4250008.27.20

1A4250008.30.20

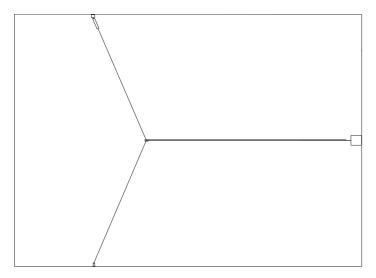

1A4480100.00.00 - Example of installation with accessory 1

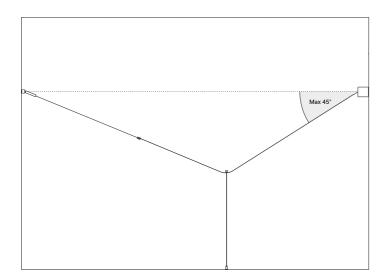

1A4490100.00.00 - Example of installation with accessory 2

TRACKS - PROFILES



/ 2007

Pure line in space.
Our Sistema track holds the light solution Dot.

BINARIO TRIFASE / 2007


1A2800300.14.00 1A2800400.14.00 1A2800300.10.00 1A2800400.10.00 1A2800300.07.00 1A2800400.07.00 1A2800300.05.00 1A2800400.05.00 Power right connector

1A2800300.12.00 1A2800400.12.00 1A2800300.13.00 and power left connector 1A2800400.13.00 1A2800300.09.00 1A2800400.09.00 1A2800300.08.00 1A2800300.11.00 1A2800400.11.00 1A2800300.09.00 1A2800400.09.00 1A2800300.08.00 1A2800400.08.00

1A2800300.07.00 1A2800400.07.00

Power intermediate connector installation

installation

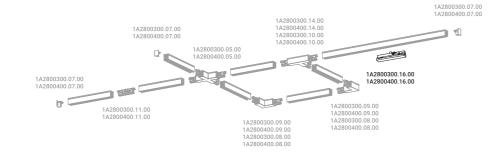

BINARIO TRIFASE / 2007

Systems / Direct / Indoor

Material Metal - Polycarbonate

.03 Matt White Finish .04 Matt Black

Note Ceiling and wall track system.

Compulsory accessories

Installation kits



Matt White	1A2800300.01.00
Matt Black	1A2800400.01.00

Track 2 m	Not included
Matt White	1A2800300.02.00
Matt Black	1A2800400.02.00

Track 3 m	Not included
Matt White	1A2800300.03.00
Matt Black	1A2800400.03.00



End cap	Not included
Matt White	1A2800300.07.00
Matt Black	1A2800400.07.00

Connectors



Power right connector	Not included
Matt White	1A2800300.13.00
Matt Black	1A2800400.13.00



Power left connector	Not included
Matt White	1A2800300.12.00
Matt Black	1A2800400.12.00



Power intermediate connector	Not included
Matt White	1A2800300.16.00
Matt Black	1A2800400.16.00

BINARIO TRIFASE / 2007

Optional accessories

Installation kits



Linear connector	Not included
Matt White	1A2800300.11.00
Matt Black	1A2800400.11.00



Internal L connector	Not included
Matt White	1A2800300.09.00
Matt Black	1A2800400.09.00



External L connector	Not included
Matt White	1A2800300.08.00
Matt Black	1A2800400.08.00



Right T connector	Not included
Matt White	1A2800300.14.00
Matt Black	1A2800400.14.00











Adjustable suspension cable	Not included
Length 1500 mm	1A2800000.04.00

Adjustable suspension cable	Not included
Length 3000 mm	1A2800000.05.00

Adjustable suspension cable	Not included
Length 5000 mm	1A2800000.06.00



Cutting tool	Not included
	1A2800300.17.00



BINARIO TRIFASE

Optional accessories

Luminaires



DOT BINARIO 51 Max 10W

220V - 50Hz ON/OFF

Bulb not included IP20

Matt White - ON/OFF Matt Black - ON/OFF 1A3710308.00.00 1A3710408.00.00 / 2007

/ 2007 BINARIO TRIFASE

Optional accessories

Bulbs

-1	LED - GU10 - PAR16				Not included
	3000	240V - 5,5W - 25°)K - 375lm - CRI >97 gy Efficiency G - Dimmable	DOT BINARIO 51	1Y0330500	

LE	D SORAA - GU10 - MR16			Not include
_	230V - 7,5W - 10° 2700K - 390lm - CRI >95	DOT BINARIO 51	1Y1580210	
	Energy Efficiency G - Dimmable			

LED SORAA - GU10 - MR16			Not included
230V - 7,5W - 10° 3000K - 410Im - CRI >95	DOT BINARIO 51	1Y1580010	
Energy Efficiency G - Dimmable			

Other accessories



Darklight				Not included
	LED SORAA - GU10 - MR16	DOT BINARIO 51	1Y1580040	



25° beam filter				Not included
	LED SORAA - GU10 - MR16	DOT BINARIO 51	1Y1580020	




36° beam filter				Not included
	LED SORAA - GU10 - MR16	DOT BINARIO 51	1Y1580030	

OUTDOOR



Maurizio Mancini / 2012






BELLADINOTTE Maurizio Mancini / 2012

Floor-Outdoor / Indirect / Outdoor

Metal Material

Finish .00 Standard

Outdoor lamp with spike. Adjustable along the vertical axis. Plane with mirror finish. Matt green mirror finish rear plane. Black cable (5 m). Note



BELLADINOTTE

2x4,2W 24V DC

2700K - 262lm / 3000K - 282lm

CRI >90

Driver not included

Standard - 2700K Standard - 3000K 1A3560008.27.20 1A3560008.30.20

Optional accessories

Installation kits




Driver connector IP68	Not included
1 Piece	1A1660000.00.00

Drivers



Driver		Not included
110-240V	24V/25W/IP67/ON/OFF	1Z1120620







BUBKA Daniele Sprega / 2014


Outdoor-Floor / Direct / Outdoor

Material AISI 316L Stainless Steel - Metal

Finish .00 Standard

Note Outdoor floor luminaire. Adjustable along the vertical axis. AISI 316L

stainless steel stem. Black cable (7 m).

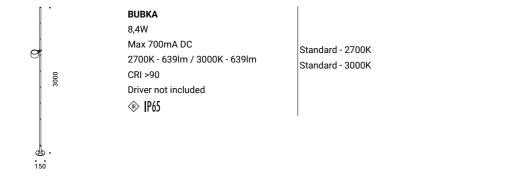

Daniele Sprega / 2014

Optional accessories

Installation kits




Driver connector IP68	Included
1 Piece	1A1660000.00.00

BUBKA



Anchoring bolt		No	t included
	Cut-out Ø 250 mm Minimum space for mounting 350 mm	1A3620000.00.00	

Lighting modules



Additional LED h	ead	Not included
Matt Black	Max 700mA DC - 8,4W 2700K - 350lm - CRI >90	1A3610408.27.20
	Max 700mA DC - 8,4W 3000K - 350lm - CRI >90	1A3610408.30.20

Drivers

1A3600008.27.20


1A3600008.30.20



Driver box		Not in	ncluded
	Input 110-240V - 50/60Hz	1A3880008.700	
	Output 700mA - 20W - IP65 - DALI		



Daniele Sprega / 2021





BUBKA BOLLARD Daniele Sprega / 2021

Standard - 2700K

Standard - 3000K

Outdoor-Floor / Direct / Outdoor

Material AISI 316L Stainless Steel - Metal

.00 Standard Finish

Note Outdoor floor luminaire. Adjustable along the vertical axis. AISI 316L

stainless steel stem. Black cable (9 m).

BUBKA BOLLARD

8,4W

Max 700mA DC

2700K - 350lm / 3000K - 350lm

CRI >90

Driver not included

1A1440008.27.20

1A1440008.30.20

Daniele Sprega / 2021

Optional accessories

Installation kits




Driver connector IP68	Included
1 Piece	1A1660000.00

BUBKA BOLLARD



A3620000.00.00	
1	A3620000.00.00

Lighting modules




Additional LED hea	d	Not included
Matt Black	Max 700mA DC - 8,4W 2700K - 350lm - CRI >90	1A3610408.27.20
	Max 700mA DC - 8,4W 3000K - 350lm - CRI >90	1A3610408.30.20

Drivers



Driver box		Not included	l
	Input 110-240V - 50/60Hz	1A3880008.350	
	Output 350mA - 17W - IP65 - DALI		





BUIO - TRIMLESS Maurici Ginés / 2023

Matt Black - 2700K

Matt Black - 3000K

Matt Black - 2700K

Matt Black - 3000K

BUIO - TRIMLESS

Recessed / Direct / Outdoor

Material

.04 Matt Black Finish

Note Outdoor luminaire. Available with transparent or black glass. Black cable

(1 m).

. 35 .

BUIO TRIMLESS - 13°

Black filter 6,2W

24V DC

2700K - 120lm / 3000K - 123lm

CRI >90

Beam 13° UGR <19

Driver not included

BUIO TRIMLESS - 25°

Black filter 6,2W

24V DC

2700K - 150lm / 3000K - 155lm

CRI >90

Beam 25° UGR <19

Driver not included

. 35 .

Maurici Ginés / 2023

BUIO TRIMLESS - 32°

Black filter 6,2W

24V DC

2700K - 140lm / 3000K - 144lm

CRI >90 Beam 32° UGR <19

Driver not included

Matt Black - 2700K Matt Black - 3000K

1A5210408.27.20 1A5210408.30.20

BUIO TRIMLESS ELLIPTICAL

Black filter

2700K - 132lm / 3000K - 136lm

UGR <19

Driver not included

Matt Black - 2700K Matt Black - 3000K 1A5230408.27.20 1A5230408.30.20

293

6,2W

24V DC

CRI >90

292


1A5200408.27.20

1A5200408.30.20

1A5220408.27.20

1A5220408.30.20

BUIO - TRIMLESS Maurici Ginés / 2023



BUIO TRIMLESS - 13° Transparent filter

6,2W

24V DC


2700K - 239lm / 3000K - 246lm

CRI >90 Beam 13° UGR <19

Driver not included

Matt Black - 2700K

1A5240408.27.20 1A5240408.30.20 Matt Black - 3000K



BUIO TRIMLESS - 25°

Transparent filter 6,2W

24V DC


2700K - 300lm / 3000K - 309lm

CRI >90 Beam 25°

UGR <19

Driver not included

Matt Black - 2700K Matt Black - 3000K 1A5260408.27.20 1A5260408.30.20



BUIO TRIMLESS - 32°

Transparent filter

6,2W

24V DC 2700K - 279lm / 3000K - 288lm

CRI >90

Beam 32° UGR <19

Driver not included

Matt Black - 2700K Matt Black - 3000K

1A5250408.27.20 1A5250408.30.20 Maurici Ginés / 2023

BUIO TRIMLESS ELLIPTICAL Transparent filter

6,2W 24V DC

2700K - 263lm / 3000K - 271lm

CRI >90 UGR <19

Driver not included

BUIO - TRIMLESS

Matt Black - 2700K

Matt Black - 3000K

1A5270408.27.20 1A5270408.30.20

Compulsory accessories

Installation kits



Installation box Not included Standard 1A5280000.00.00

Optional accessories

Drivers



Driver		Not include	led
110-240V	24V/25W/IP67/ON/OFF	1Z1120620	

BUIO - TRIM

Matt Black - 2700K

Matt Black - 3000K

Matt Black - 2700K

Matt Black - 3000K

Maurici Ginés / 2023

1A5120408.27.20

1A5120408.30.20

1A5140408.27.20

1A5140408.30.20

BUIO - TRIM


Recessed / Direct / Outdoor

Material

.04 Matt Black Finish

Note Outdoor luminaire. Available with transparent or black glass. Black cable

(1 m).



BUIO TRIM - 13°

Black filter 6,2W


24V DC

2700K - 120lm / 3000K - 123lm

CRI >90 Beam 13°

UGR <19

Driver not included



BUIO TRIM - 25°

Black filter

6,2W

24V DC

2700K - 150lm / 3000K - 155lm

CRI >90

Beam 25° UGR <19

Driver not included



Maurici Ginés / 2023

BUIO TRIM - 32°

Black filter 6,2W

24V DC

2700K - 140lm / 3000K - 144lm

CRI >90 Beam 32°

UGR <19

Driver not included

Matt Black - 2700K

Matt Black - 3000K

1A5130408.27.20 1A5130408.30.20

BUIO TRIM ELLIPTICAL

Black filter 6,2W

24V DC

2700K - 132lm / 3000K - 136lm

CRI >90 UGR <19

Driver not included


Matt Black - 2700K Matt Black - 3000K 1A5150408.27.20 1A5150408.30.20

BUIO - TRIM Maurici Ginés / 2023

BUIO - TRIM Maurici Ginés / 2023

Matt Black - 2700K

Matt Black - 3000K



BUIO TRIM ELLIPTICAL

Transparent filter 6,2W

24V DC

2700K - 263lm / 3000K - 271lm CRI >90 UGR <19

Driver not included

1A5190408.27.20 1A5190408.30.20

. 45 .

BUIO TRIM - 25°

BUIO TRIM - 13°

Transparent filter

2700K - 239lm / 3000K - 246lm

6,2W

24V DC

CRI >90

Beam 13°

UGR <19

Transparent filter 6,2W

Driver not included

24V DC

2700K - 300lm / 3000K - 309lm

CRI >90 Beam 25°

UGR <19

Driver not included

Matt Black - 2700K Matt Black - 3000K


Matt Black - 2700K

Matt Black - 3000K

1A5180408.27.20 1A5180408.30.20

1A5160408.27.20

1A5160408.30.20



BUIO TRIM - 32°

Transparent filter

6,2W 24V DC

2700K - 279lm / 3000K - 288lm

CRI >90 Beam 32°

UGR <19 Driver not included

Matt Black - 2700K Matt Black - 3000K 1A5170408.27.20 1A5170408.30.20 Compulsory accessories

Installation kits



Installation box Not included Standard 1A5280000.00.00

Optional accessories

Drivers



Driver		Not included
110-240V	24V/25W/IP67/ON/OFF	1Z1120620

BUIO - SPOT Maurici Ginés / 2023

Matt Black - 2700K

Matt Black - 3000K

Matt Black - 2700K

Matt Black - 3000K

Maurici Ginés / 2023

Floor-Wall-Ceiling / Direct / Outdoor


Material

Finish .04 Matt Black

Note

Outdoor luminaire. Adjustable spike and wall versions. Available with transparent or black glass. AISI 316L stainless steel accessories for the

spike and wall versions. Black cable (1 m).



BUIO - 13°

Black filter

6,2W 24V DC

2700K - 120lm / 3000K - 123lm

1/300

CRI >90 Beam 13° UGR <19

Driver not included

. 801

BUIO - 25°

Black filter

6,2W

24V DC

2700K - 150lm / 3000K - 155lm

CRI >90 Beam 25°

UGR <19

Driver not included

. 801

BUIO - 32°

Black filter

6,2W

24V DC

2700K - 140lm / 3000K - 144lm

CRI >90 Beam 32°

UGR <19

Driver not included

1A5050408.27.20 1A5050408.30.20

BUIO - SPOT



1A5040408.27.20

1A5040408.30.20

1A5060408.27.20

1A5060408.30.20

BUIO ELLIPTICAL

Black filter 6,2W

24V DC

2700K - 132lm / 3000K - 136lm

CRI >90 UGR <19

Driver not included


Matt Black - 2700K Matt Black - 3000K

Matt Black - 2700K

Matt Black - 3000K

1A5070408.27.20 1A5070408.30.20

BUIO - SPOT BUIO - SPOT Maurici Ginés / 2023 Maurici Ginés / 2023



BUIO - 13°

Transparent filter 6,2W

24V DC

2700K - 239lm / 3000K - 246lm

CRI >90 Beam 13°

UGR <19

Driver not included

Matt Black - 2700K

Matt Black - 2700K

Matt Black - 3000K

Matt Black - 3000K

1A5080408.27.20 1A5080408.30.20

1A5100408.27.20

1A5100408.30.20

BUIO - 25°

Transparent filter 6,2W

24V DC

2700K - 300lm / 3000K - 309lm

CRI >90 Beam 25°

UGR <19

Driver not included

BUIO - 32° Transparent filter

6,2W

24V DC

2700K - 279lm / 3000K - 288lm

CRI >90 Beam 32°

UGR <19 Driver not included

Matt Black - 2700K Matt Black - 3000K

1A5090408.27.20 1A5090408.30.20 . 30 .

BUIO ELLIPTICAL

Transparent filter

6,2W 24V DC

2700K - 263lm / 3000K - 271lm CRI >90

UGR <19

Driver not included

Matt Black - 2700K Matt Black - 3000K 1A5110408.27.20 1A5110408.30.20

Compulsory accessories

Installation kits



Wall bracket			Not included
Stainless Steel	Brushed INOX	1A4431000.00.00	



Ceiling rose			Not included
Matt Black	Brushed INOX	1A4441000.00.00	



Earth spike			Not included
Stainless Steel	Brushed INOX	1A4451000.00.00	




Tree strap		Not included
Standard	Length 1 m	1A4590000.00

Optional accessories

Drivers



Driver		Not included
110-240V	24V/25W/IP67/ON/OFF	1Z1120620

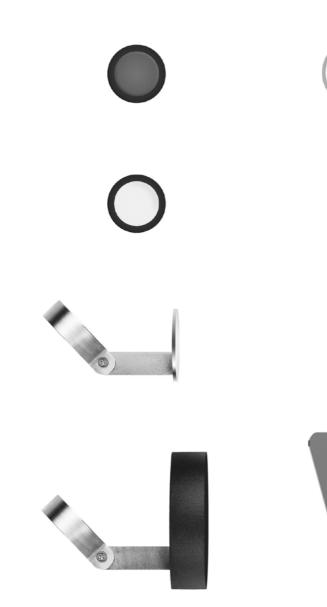



Daniele Sprega / 2012

A small luminous elf that you can install in your garden or inside a vase.

A thin stem stuck into the ground and a little adjustable LED projector.

For illuminating a flower, a plant or simply to accompany us along a path.

Lamp with spike.

GRILLO

Daniele Sprega / 2012

1A3570408.27.20

1A3570408.30.20

Floor-Outdoor / Direct / Outdoor

Material AISI 316L Stainless Steel - Metal

Finish .04 Matt Black

Note Outdoor lamp with spike. Adjustable in all directions. AISI 316L stainless

steel stem. Black cable (5 m).

2000

GRILLO

4,2W 24V DC

2700K - 262lm / 3000K - 282lm

Matt Black - 2700K

Matt Black - 3000K

CRI >90

Driver not included

Daniele Sprega / 2012 GRILLO

Optional accessories

Installation kits



Driver connector IP68			Included
	1 Piece	1A1660000.00.00	



Additional stem 1 m			Not included
Standard	AISI 316L stainless steel	1A3590000.00.00	

Lighting modules




Additional LED h	ead	Not included
Matt Black	24V DC - 4,2W 2700K - 262lm - CRI>90	1A3580408.27.20
	24V DC - 4,2W 3000K - 282lm - CRI>90	1A3580408.30.20

Drivers



Priver		Not included	
10-240V	24V/25W/IP67/ON/OFF	1Z1120620	





IMU Omar Carraglia / 2013

Standard - 3000K

Wall-Outdoor / Direct / Outdoor

Material

Metal

Finish .00 Standard

Note

Outdoor wall luminaire. Matt black body and matt red top cover. Red hole

ligh




IMU

5,5W

Max 350mA DC 3000K - 306lm

CRI >80

Driver not included



Installation kits



Driver connector IP68	Included
1 Piece	1A1660000.00.00


1A3550008.30.20

Drivers



Driver box		Not included
	Input 110-240V - 50/60Hz	1A3880008.350
	Output 350mA - 17W - IP65 - DALI	





Davide Groppi - Beppe Merlano / 2022

The idea is to bring light wherever you like.

A simple project: a cable and a LED.

Indoor version also available.



NEURO OUTDOOR


Davide Groppi - Beppe Merlano / 2022

Suspension-Outdoor / Direct / Outdoor

Material AISI 316L Stainless Steel - Metal

.04 Matt Black .32 Copper Oxide Finish

Note Outdoor suspension luminaire. Black cable (10 m).



NEURO OUTDOOR

3,2W 24V DC

2700K - 262lm / 3000K - 282lm

CRI >90

Driver not included

Matt Black - 2700K Matt Black - 3000K

Copper Oxide - 2700K Copper Oxide - 3000K

1A4030408.27.20 1A4030408.30.20 1A4033208.27.20 1A4033208.30.20


Optional accessories

Installation kits



Driver connector IP68	Included
1 Piece	1A1660000.00.00

Drivers



Driver	Not included	
110-240V	24V/25W/IP67/ON/OFF	1Z1120620





Maurici Ginés / 2023

Night has always been a source of inspiration.

We walk, and we are not alone.

Nuit is a small travel companion that draws our night-time journeys.

NUIT Maurici Ginés / 2023

Outdoor-Recessed / Diffuse / Indoor-Outdoor

Material Metal

Finish .03 Matt White .27 Gravity Black .38 Blasted Inox

Note Outdoor recessed luminaire. Minimum space for recessed installation:

55 mn



NUIT

1W 24V DC

2700K - 45lm / 3000K - 50lm

CRI >90

Driver not included

 Matt White - 2700K
 1A1320308.27.20

 Matt White - 3000K
 1A1320308.30.20

 Gravity Black - 2700K
 1A1322708.27.20

 Gravity Black - 3000K
 1A1322708.30.20

 Blasted Inox - 2700K
 1A1323808.27.20

 Blasted Inox - 3000K
 1A1323808.30.20

Maurici Ginés / 2023

Compulsory accessories

Installation kits



 Concrete box
 Not included

 Standard
 1A4460000.00.00

Optional accessories

Installation kits



Plasterboard frame 12,5 mm		Not included
Matt White	Cut-out 100x100 mm	1A4470300.00.00
	Minimum space for mounting 120 mm	



Adapter plasterboard 25 mm	Not included
Standard	1A5030000.00.00

Drivers




Driver		Not included	
110-240V	24V/25W/IP67/ON/OFF	1Z1120620	

320

NUIT



Davide Groppi - Giorgio Rava / 2020

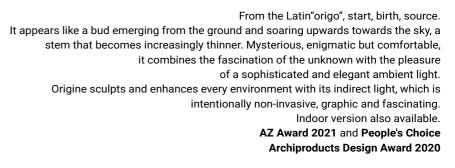

ORIGINE OUTDOOR

Davide Groppi - Giorgio Rava / 2020

Outdoor-Floor / Indirect / Outdoor

Glass fiber - Metal Material .04 Matt Black Finish

Outdoor floor luminaire. Black cable (5 m). Note



ORIGINE OUTDOOR

35W 24V DC

2700K - 2872lm / 3000K - 2930lm

CRI >80

Driver not included

Matt Black - 2700K Matt Black - 3000K 1A2480408.27.20 1A2480408.30.20


Optional accessories

Installation kits



Driver connector IP68	Included
1 Piece	1A1660000.00

Drivers



Driver		
100-240V	24V/60W/IP67/1-10V	1Z1120260





A piece of architecture to be used in space.

A concrete cube that allows you to understand volumes and architecture in an unusual and sometimes unprecedented way.

Indoor version also available.



Alberto Zattin / 2006


1A1150008.30.20

Floor-Outdoor / Direct / Outdoor

Material Finish Cement - Metal
.00 Standard

Note

Outdoor floor luminaire. Concrete body. Black cable (2,5 m).



Q²

20W

Max 500mA DC

3000K - 2058lm

CRI >90

Driver not included

Optional accessories

Installation kits




Driver connector IP68	Included
1 Piece	1A1660000.00.00

Standard - 3000K

Drivers



Driver box		Not included
	Input 110-240V - 50/60Hz	1A3880008.500
	Output 500mA - 17W - IP65 - DALI	

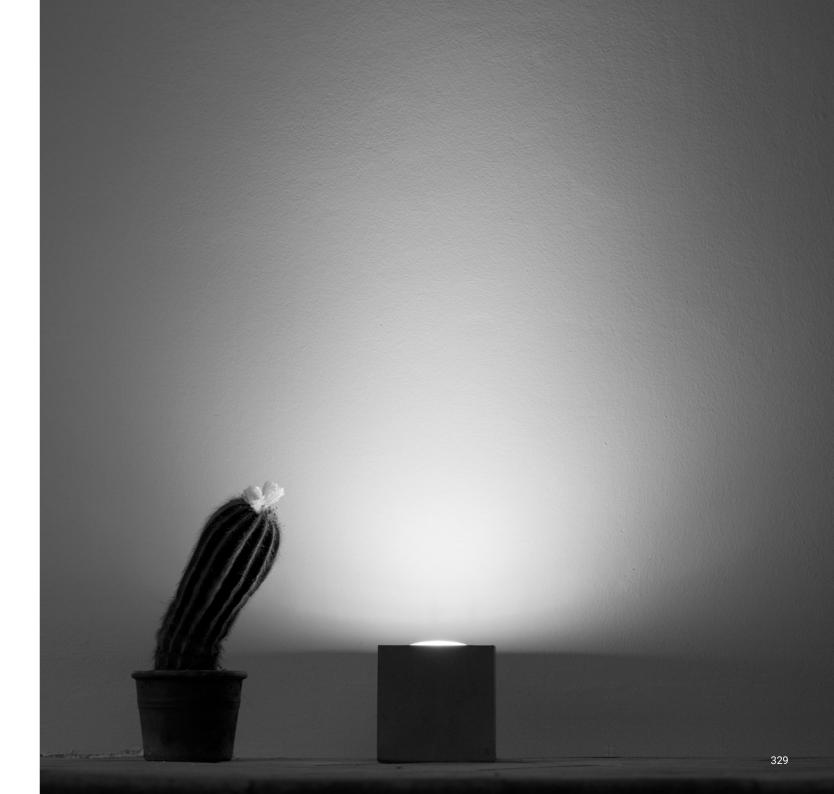



Enzo Calabrese - Davide Groppi / 2011

A special project, an authentic ready-made.

Obtained from a fishing flexible rod, it is a delicate and elegant sign, which brings to mind the subtle branches of a willow tree or bamboo canes floating on a light breeze.

Sampei is an unexpected gift, it is the magic of looking up, using light as a hook, and being amazed by so much weightlessness.

Indoor version also available.





SAMPEI 440 OUTDOOR


Enzo Calabrese - Davide Groppi / 2011

Floor-Outdoor / Direct / Outdoor

Material Glass fiber - Metal

.03 Matt White Finish .04 Matt Black

Outdoor floor luminaire. Adjustable in all directions. Black cable (5 m). Note



SAMPEI 440 OUTDOOR

8,4W Max 700mA DC 2700K - 639lm / 3000K - 639lm CRI >90 Driver not included

Matt White - 2700K Matt White - 3000K Matt Black - 2700K Matt Black - 3000K

1A3770308.27.20 1A3770308.30.20 1A3770408.27.20 1A3770408.30.20

Optional accessories

Installation kits



Driver connector IP68	Included
1 Piece	1A1660000.00

Drivers



Driver box			Not included
Input 110-2	240V - 50/60Hz	1A3880008.700	
Output 700	mA - 20W - IP65 - DALI		



BULBS

	Socket	Voltage	Power	Beam Angle	CCT	Lumens	CRI	Energy Efficiency	Dimmable	Code
	E27	220-240V	9,5W	25°	3000K	760lm	>80	F	Х	1Y0330730
	E27	220-240V	11,2W	360°	2700K	1521lm	>90	D	Х	1Y0330790
	E27	220-240V	20W	200°	2700K	2452lm	>80	E	Х	1Y2160020
\Box	GU10	220-240V	5,5W	25°	3000K	375lm	>97	G	Х	1Y0330500
\Box	GU10	230V	7,5W	10°	2700K	390lm	>95	G	Х	1Y1580210
◁	GU10	230V	7,5W	10°	3000K	410lm	>95	G	Х	1Y1580010

DRIVERS

	Power	Input	Output	Dimming	Protection	Code
:8 :24	60W(40W)	220-240V(100-127V)	1000mA	DALI	IP20	1Z0241140.1000
3	20W	100-240V	12V	1-10V	IP20	1Z0240900
250	50W	100-240V	24V	ON/OFF	IP20	1Z1120490
2: 200	80W	100-240V	24V	ON/OFF	IP20	1Z1120440
29. L. 25.	22W(12W)	220-240V(100-127V)	24V	ON/OFF	IP20	1Z0240410
, , o , , o , o , o , o , o , o , o , o	22W(12W)	220-240V(100-127V)	24V	TRIAC/IGBT	IP20	1Z0240410 + 1Z0000034
:8	13,5W(13,5W)	220-240V(110-127V)	250mA	DALI - PUSH - 1-10V	IP20	1Z0241270.250
:8	18W	220-240V	350mA	TRIAC/IGBT	IP20	1Z0240740
:8	17W(15W)	220-240V(100-127V)	350mA	DALI	IP20	1Z0240860.350
:8	18W(15W)	220-240V(100-127V)	350mA	PUSH	IP20	1Z0240840.350
12. 124	35W(35W)	220-240V(100-127V)	350mA	DALI - PUSH - 1-10V	IP20	1Z0241140.350

DRIVERS

	Power	Input	Output	Dimming	Protection	Code
2:20	20W(15W)	220-240V(100-127V)	500mA	DALI	IP20	1Z0240860.500
:8	20W(15W)	220-240V(100-127V)	500mA	PUSH	IP20	1Z0240840.500
22. 124	35W(35W)	220-240V(100-127V)	500mA	DALI	IP20	1Z0241140.500
:8	25W(13,5W)	220-240V(110-127V)	500mA	DALI - PUSH - 1-10V	IP20	1Z0241270.500
	150W	100-240V	24V	1-10V	IP67	1Z1120500
, 1 ¹ . LE	60W	100-240V	24V	1-10V	IP67	1Z1120260
	96W	100-240V	24V	1-10V	IP67	1Z1120540
	25W	110-240V	24V	ON/OFF	IP67	1Z1120620
	· · · · · · · · · · · · · · · · · · ·			· · · · · · · · · · · · · · · · · · ·		


COMMON ACCESSORIES


	Size	Cut-out	Finish	Code	
Plasterboard trapdoors / Botole	in cartongesso				
	200x200 mm	205x205 mm	Standard	1A3780000.00.00	
	400x400 mm	415x415 mm	Standard	1A3790000.00.00	
Clamp / Bloccacavo					
			Matt White	1A3270300.00.00	
	Ø 50x20 mm		Matt Black	1A3270400.00.00	
Driver connector IP68 / Connettore driver IP68					
			Standard	1A1660000.00.00	

SUSPENSION KITS

Ceiling suspension kit








Magnetic fixing

	Version	Use	Product reference	Finish	Code
	Recessed	For account in orbital	REFLEX S 2 SHANGHAI 1	Matt White	1X0000300.01.00
	suspension kit.01	For suspension cables	SHANGHAI 2 SOTTILE 2 SOTTILE 2 DE	Matt Black	1X0000400.01.00
	Recessed	sed	MAGIA	Matt White	1X0000300.02.00
	suspension kit.02	For elettrical cables	WAGIA	Matt Black	1X0000400.02.00
P R	Recessed	For suspension cables	MASAI 1 MASAI 2	Matt White	1X0000300.03.00
. 62	suspension kit.03			Matt Black	1X0000400.03.00
62	Recessed	Recessed suspension kit.04 For elettrical cables	ASINTOTO REFLEX S 2 or elettrical cables SHANGHAI 2 SOTTILE 2 SOTTILE 2 DE	Matt White	1X0000300.04.00
	suspension kit.04			Matt Black	1X0000400.04.00
	Recessed	Far elettrical cables	LOUIS XIV 2	Matt White	1X0000300.05.00
	suspension kit.05	suspension kit.05 For elettrical cables	SOTTOSOPRA 2	Matt Black	1X0000400.05.00

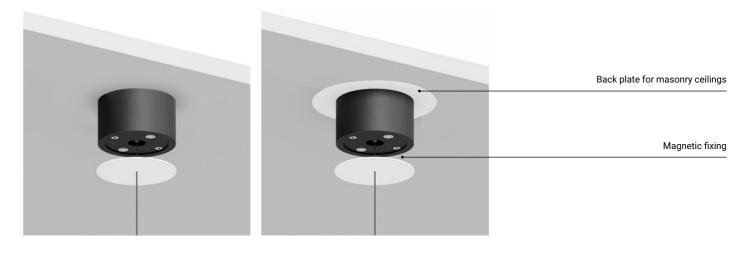

	VEISION	036	1 Todact Telefelice	1 1111311	Code
. 77.	Ceiling suspension kit.01	For suspension cables	REFLEX S 2 SHANGHAI 1 SHANGHAI 2 SOTTILE 2 SOTTILE 2 DE	Matt White	1X0010300.01.00
				Matt Black	1X0010400.01.00
	Ceiling	For elettrical cables	MAGIA	Matt White	1X0010300.02.00
	suspension kit.02		IVIAGIA	Matt Black	1X0010400.02.00
	Ceiling	For suspension cables	ASINTOTO REFLEX S 2	Matt White	1X0010300.03.00
.,	suspension kit.03	Tor suspension cables		Matt Black	1X0010400.03.00
	Ceiling suspension kit.04	For elettrical cables		Matt White	1X0010300.04.00
			SHANGHAI 2 SOTTILE 2 SOTTILE 2 DE	Matt Black	1X0010400.04.00
:=	Back plate	For masonry ceilings		Matt White	1X0050300.01.00

Product reference

Version

Finish

Code

davidegroppi.com

Davide Groppi s.r.l. Via Belizzi 20 / 22 29122 Piacenza - Italia +39.0523.571590 info@davidegroppi.com

Davide Groppi s.r.l. @ 2024 Company with sole shareholder under the direction and coordination of Dexelance